


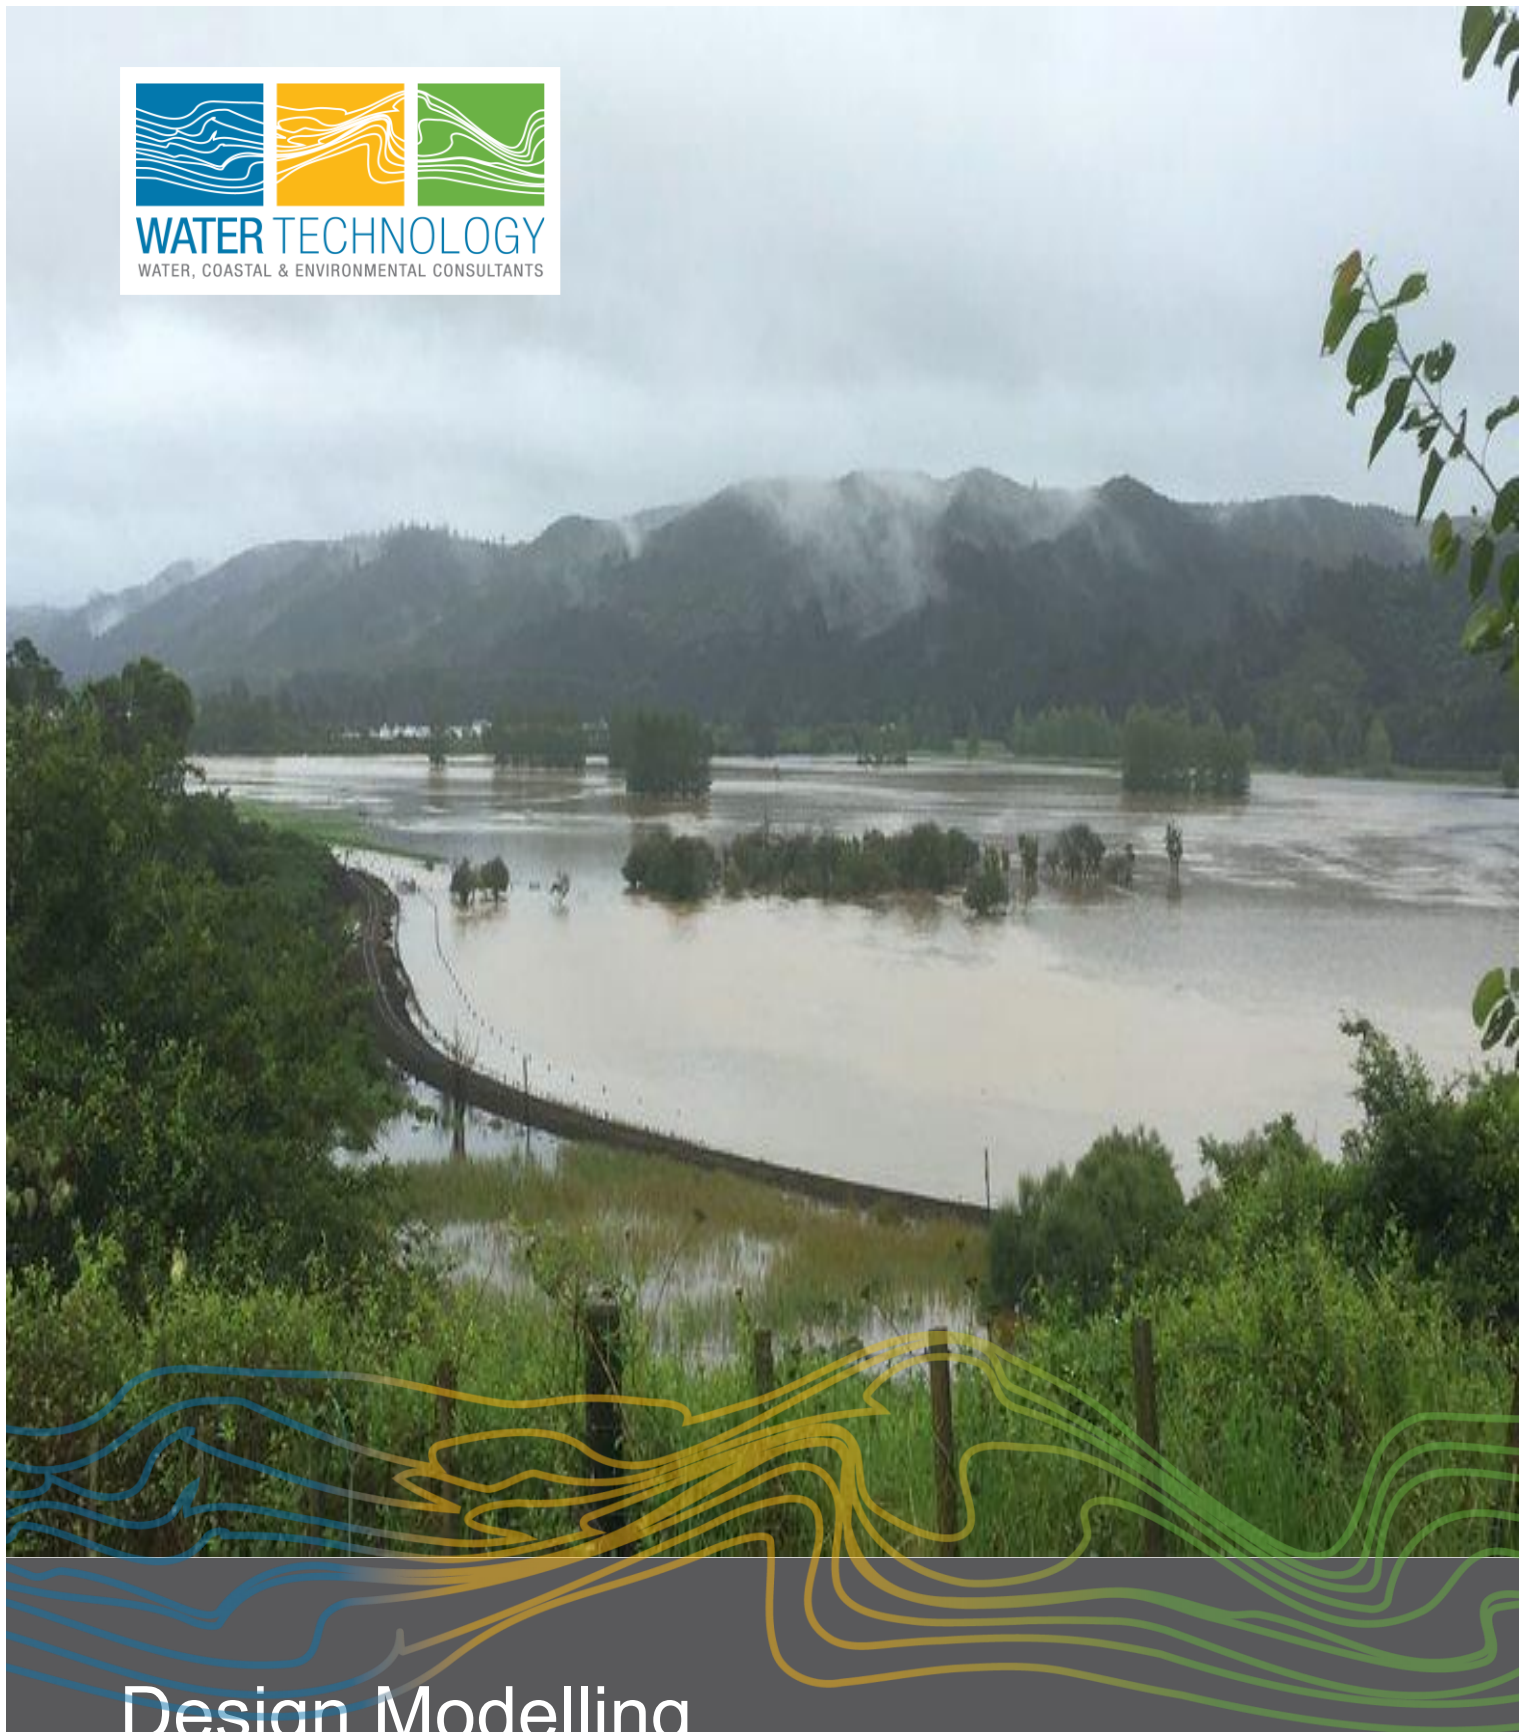

Design Modelling

Whangarei Tutukaka & Horahora Catchment (M05)

Northland Regional Council

16 October 2025



Document Status

Version	Doc type	Reviewed by	Approved by	Date issued
01	Draft	Lachlan Inglis	Ben Hughes	30/04/2021
02	Final	Lachlan Inglis	Ben Hughes	16/10/2025

Project Details

Project Name	Whangarei Tutukaka Catchment (M05)
Client	Northland Regional Council
Client Project Manager	Sher Khan & Matt De Boer
Water Technology Project Manager	Bertrand Salmi
Water Technology Project Director	Ben Hughes
Authors	Alvin Mingjun Li, Lachlan Inglis
Document Number	M05_20010434_R02V02_Validation_Report



Cover Photo: Helen Beech (<https://www.rnz.co.nz/news/national/350285/flooding-in-northland-forces-school-and-road-closures>)

COPYRIGHT

Water Technology Pty Ltd has produced this document in accordance with instructions from Northland Regional Council for their use only. The concepts and information contained in this document are the copyright of Water Technology Pty Ltd. Use or copying of this document in whole or in part without written permission of Water Technology Pty Ltd constitutes an infringement of copyright.

Water Technology Pty Ltd does not warrant this document is definitive nor free from error and does not accept liability for any loss caused, or arising from, reliance upon the information provided herein.

6 Churchill Place
Cambridge New Zealand 3434
Telephone +64 27 777 0989
NZBN 94290481 881 80





CONTENTS

1	PROJECT OVERVIEW	4
2	STUDY AREA	6
3	DESIGN MODELLING	8
3.1	Overview	8
3.2	Model Parameters	8
3.2.1	Rainfall Intensity-Duration-Frequency	8
3.2.2	Design Rainfall Temporal Patterns	9
3.2.3	Losses	10
3.2.4	Boundaries	13
4	MODELLING RESULTS	14
4.1	Modelled Result Processing/Filtering	14
5	VERIFICATION OF DESIGN FLOWS	19
5.1	Flood Frequency Analysis	19
5.2	Regional Estimation Methods	20
5.2.1	NIWA New Zealand River Flood Statistics Portal	20
5.2.2	SCS method	21
5.2.3	Rational Method	21
5.3	Verification Results	22
6	SUMMARY	25

LIST OF FIGURES

Figure 1-1	Model delineation	5
Figure 2-1	Study area	7
Figure 3-1	Example of design rainfall grid (12-hour, 1% AEP rainfall) for M05	9
Figure 3-2	Temporal pattern for design rainfall of 12-hour, 1% AEP event	10
Figure 3-3	Hydraulic model material layer	12
Figure 4-1	Design modelling of 1% flood depth	15
Figure 4-2	Design Modelling of 1% AEP flood velocity	16
Figure 4-3	Design modelling of 1% AEP Flood hazard	17
Figure 4-4	Design modelling of 1% AEP flood depth zoomed at Pataua	18
Figure 5-1	Available streamflow gauges within Whangarei Tutukaka & Horahora catchment	19
Figure 5-2	Example of flood frequency curve of Log Pearson III distribution fit	20
Figure 5-3	Verification of design modelling results against hydrological estimates	24

LIST OF TABLES

Table 3-1	Key Modelling Information	8
Table 3-2	1% AEP Design rainfall depth	10
Table 3-3	Design model parameters	11
Table 4-1	Flood hazard classification	14



Table 5-1 Summary of 1% AEP peak flow comparison

23



1 PROJECT OVERVIEW

Overview

Water Technology was commissioned by Northland Regional Council (NRC) to undertake a region-wide flood modelling study. The study area encompassed the entire Northland Regional Council area which covers an area of over 12,500 km², with the exclusion offshore islands. The aim of this project was to map riverine flood hazard zones across the entire Northland region and update existing flood intelligence.

Modelling approach

This project used a 2D Direct Rainfall (also known as Rain on Grid) approach for hydraulic modelling and has provided flood extents for a defined range of design storms. The hydraulic modelling software TUFLOW was used. TUFLOW is a widely used software package suitable for the analysis of flooding. TUFLOW routes overland flow across a topographic surface (2D domain) to create flood extent, depth, velocity and flood hazard outputs that can be used for planning, intelligence and emergency response. The latest release of TUFLOW offers several recent advanced modelling techniques to improve modelling accuracy which where practical, were tested and adopted in this project.

This study delineated and modelled 19 catchments, shown in Figure 1-1. To validate the adopted methodology and model parameters used in the design modelling, 9 catchments were calibrated against recent (and historic) flood events. The calibration/validation methodology is documented in a standalone report *NRC Riverine Flood Mapping - Calibration Report – R01* and is referred to throughout this document as the *Calibration Report*.

This report documents the design modelling methodology for Whangarei Tutukaka & Horahora Catchment (M05), noting that this catchment was not calibrated, however, model parameters reflected regional parameters and assumptions relied upon for Catchments M01, M13 & M14 which were calibrated and are located within close proximity to Catchment M05.

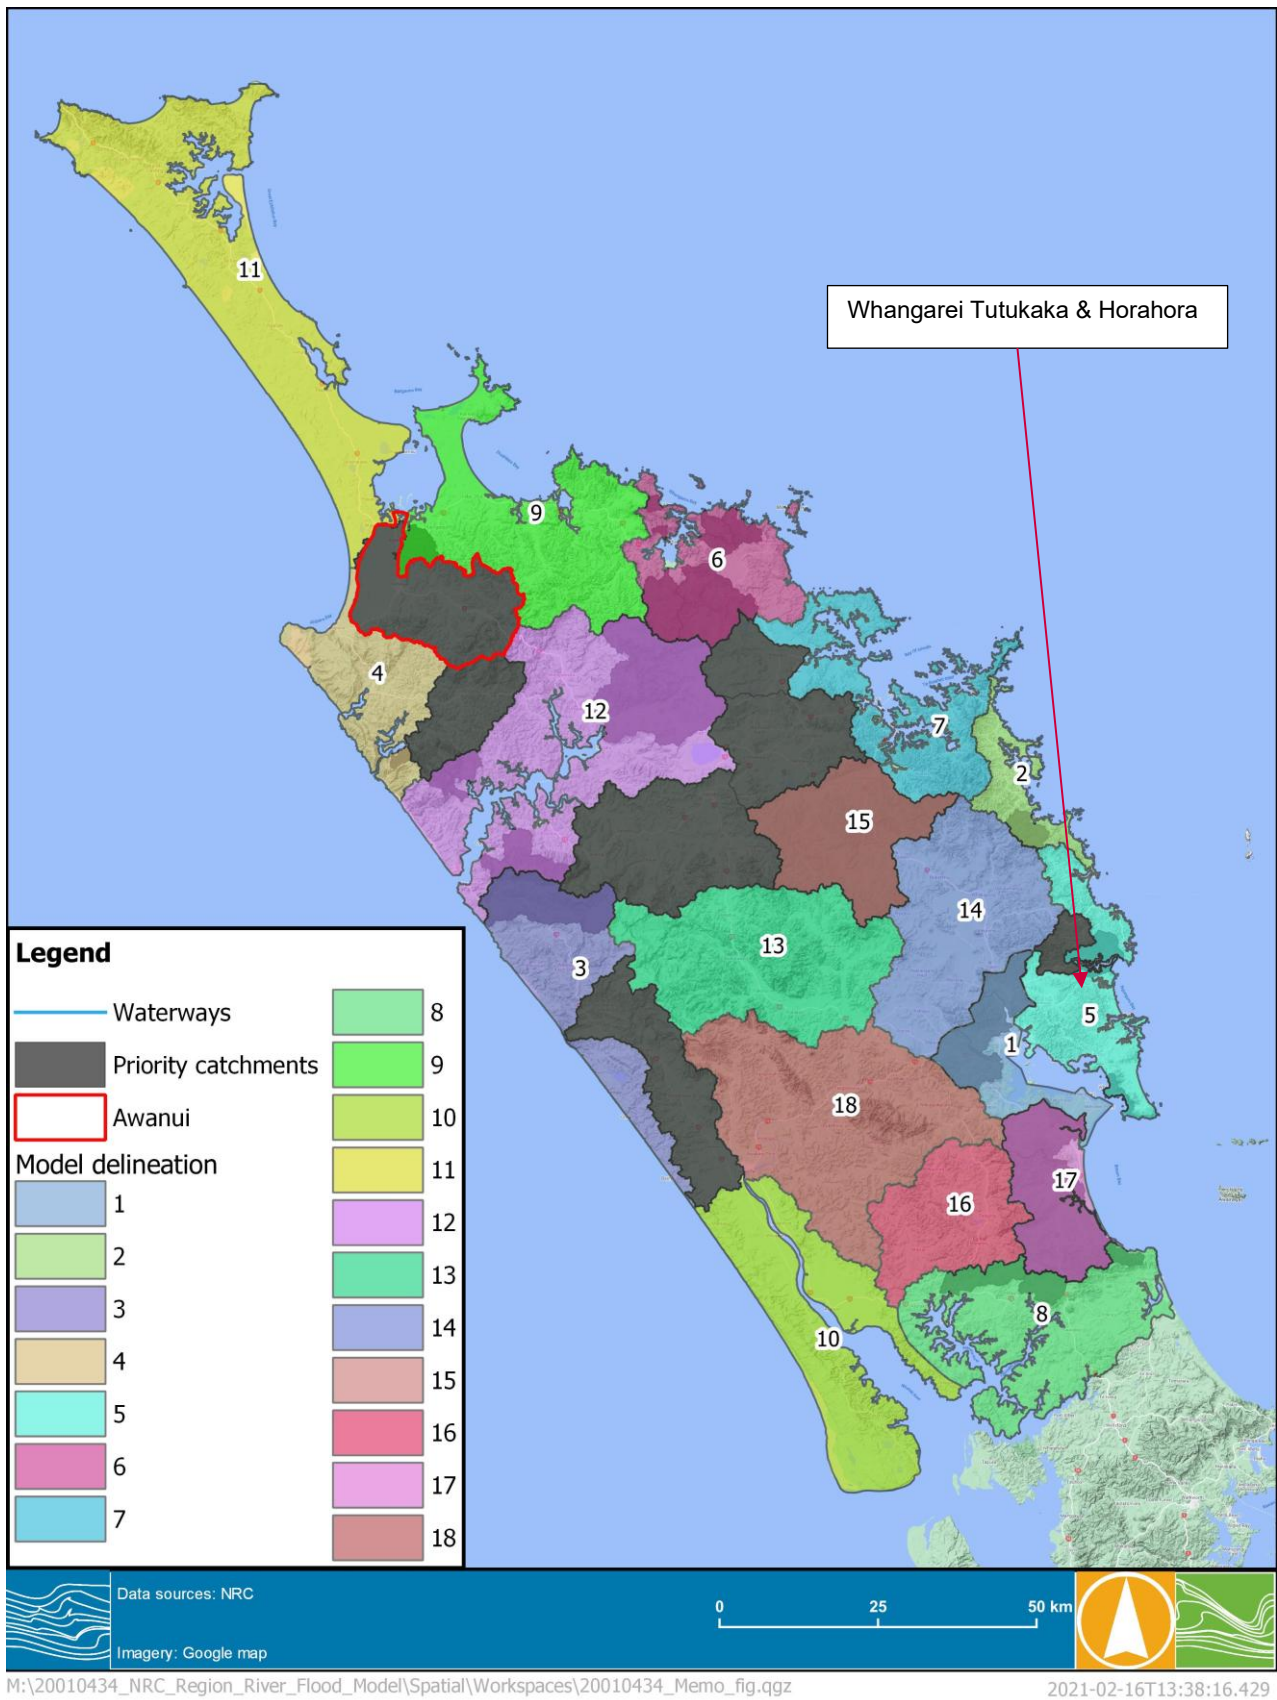


FIGURE 1-1 MODEL DELINEATION



2 STUDY AREA

The Model 05 (M05) catchment is coastal catchment, covering a total area of approximately 457 km² with Matapouri, Tutukaka, Ngunguru, Parua Bay and Onerahi its main townships. Ngunguru River, Horahora River and Pataua River are the major waterways in the catchment discharging to the east coast. Figure 2-1 displays the study area of the catchment model 05.

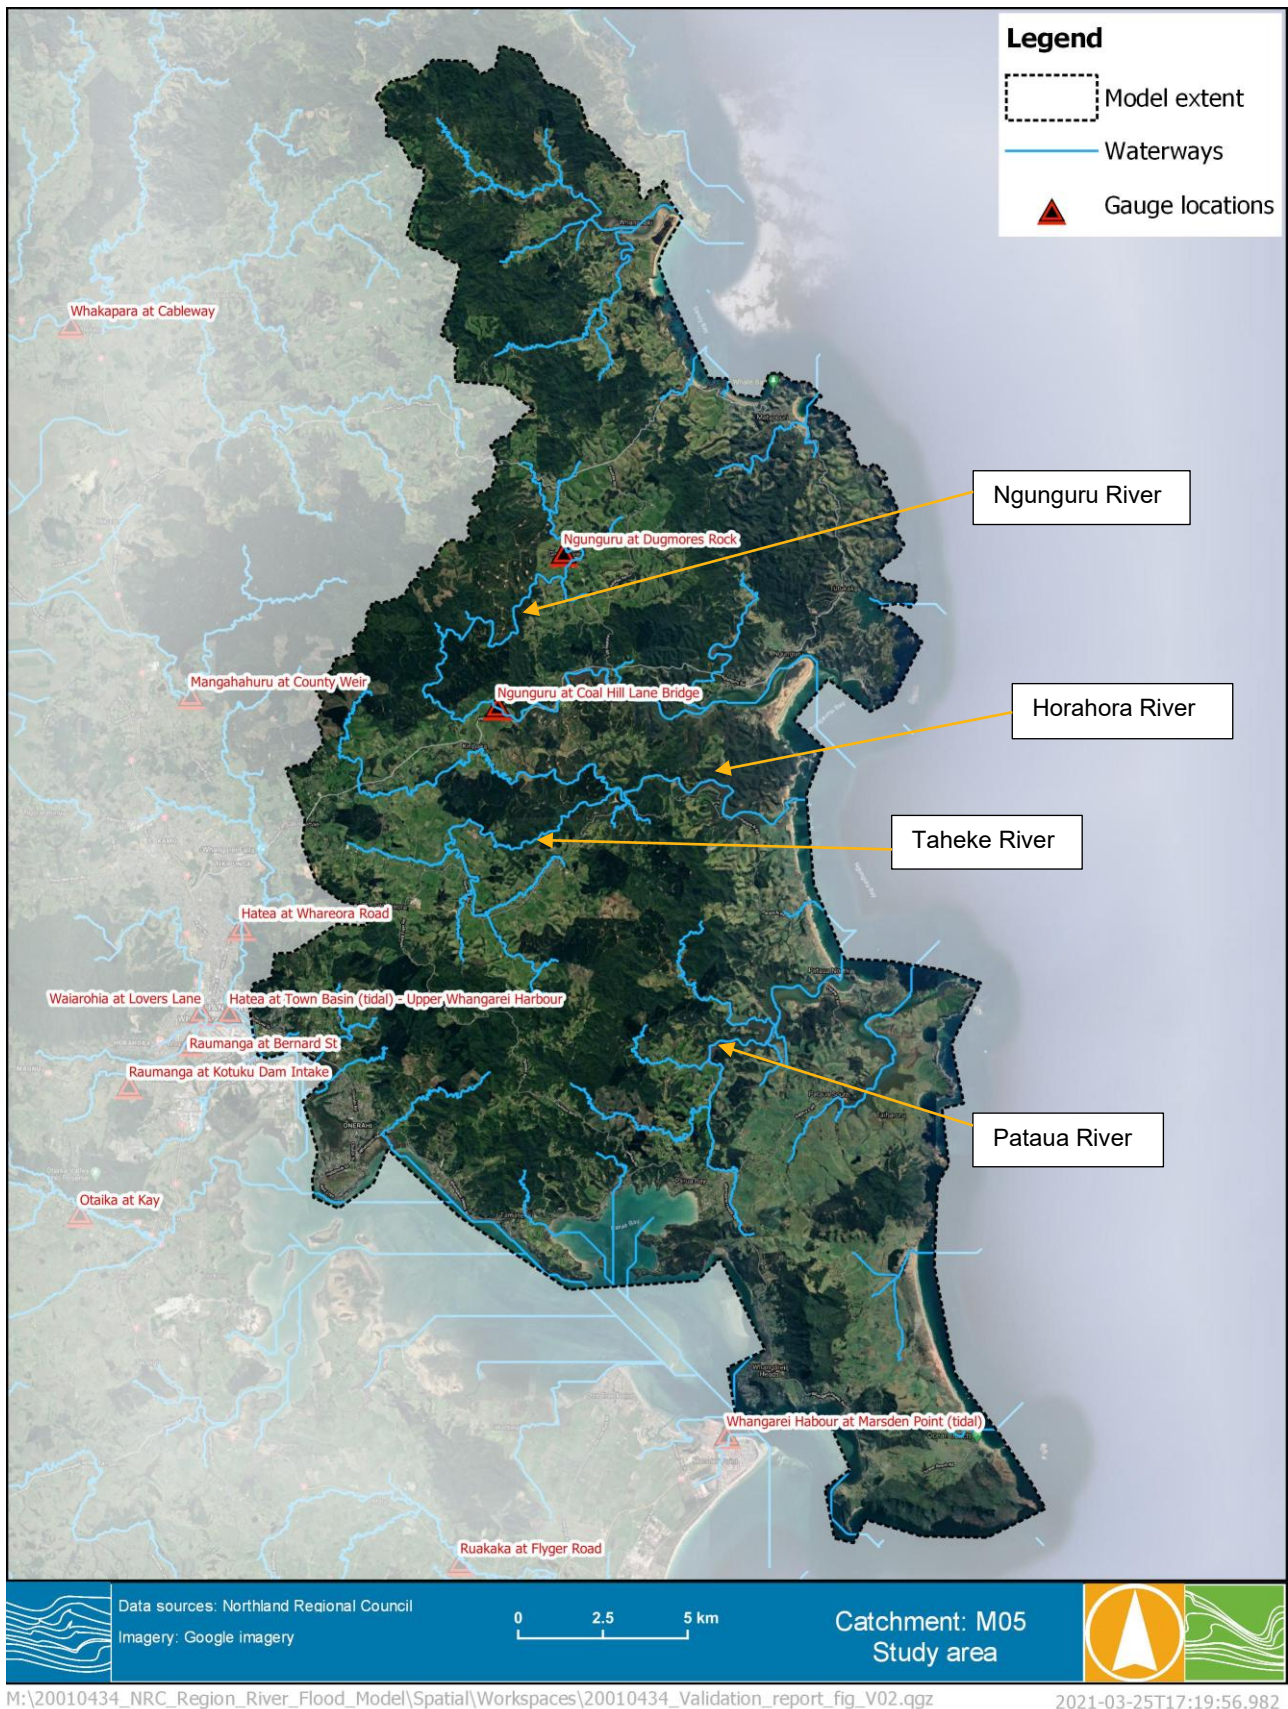


FIGURE 2-1 STUDY AREA



3 DESIGN MODELLING

3.1 Overview

A hydraulic model (TUFLOW) of the Whangarei Tutukaka & Horahora catchment (M05) was constructed to model overland flooding. A range of storm durations were run and results for each Annual Exceedance Probability (AEP) event were enveloped to ensure the critical duration was well represented across each part of the study area. The merged results captured the maximum flood level and depth of the range of design event durations modelled.

Table 3-1 and the following sections detail the key modelling information used in the development of the hydraulic model.

TABLE 3-1 KEY MODELLING INFORMATION

Terrain data	NRC 1m LiDAR without filling of sinks but includes the “burning of creek alignments’ through embankments
Model type	Direct rainfall model
Model build	Build: 2020-10-AA-iSP-w64
Rainfall	See Sections 3.2.1 and 3.2.4
Losses	See Section 3.2.3
Boundaries	See Section 3.2.4
Modelling solution scheme	TUFLOW HPC (adaptive timestep)
Modelling hardware	GPU
Modelling technique	Sub-grid-sampling (SGS)
Model grid size	10m with 1m SGS

3.2 Model Parameters

A range of model parameters were adopted, based on the calibration of catchments (i.e. M01, M13, M14 and M15) in the Whangarei District, M01 and M014 are adjacent to M05 and is found to provide suitable regional parameters. Details of these are outlined below.

3.2.1 Rainfall Intensity-Duration-Frequency

Intensity-Duration-Frequency (IDF) tables were developed by NIWA through the High Intensity Rainfall Design System (HIRDSV4)¹. Design rainfall totals for durations from 10 minute up to 120 hours were developed for design modelling and were developed at 179 rainfall gauge sites across the wider study area. The IDF tables cover a range of magnitude events from 1 in 1.58 ARI through to 1 in 250 ARI along with climate change predictions (Representative Concentration Pathway 4.6, 6 & 8.5) up to the year 2100. For this catchment, nine rainfall gauges were used with a spatially weighted grid of rainfall totals created for design modelling. Figure 3-1 shows the 12-hour cumulative rainfall grid for the 1% AEP event along with the rainfall gauge locations used to create the grid.

¹ Accessed via <https://hirds.niwa.co.nz/>

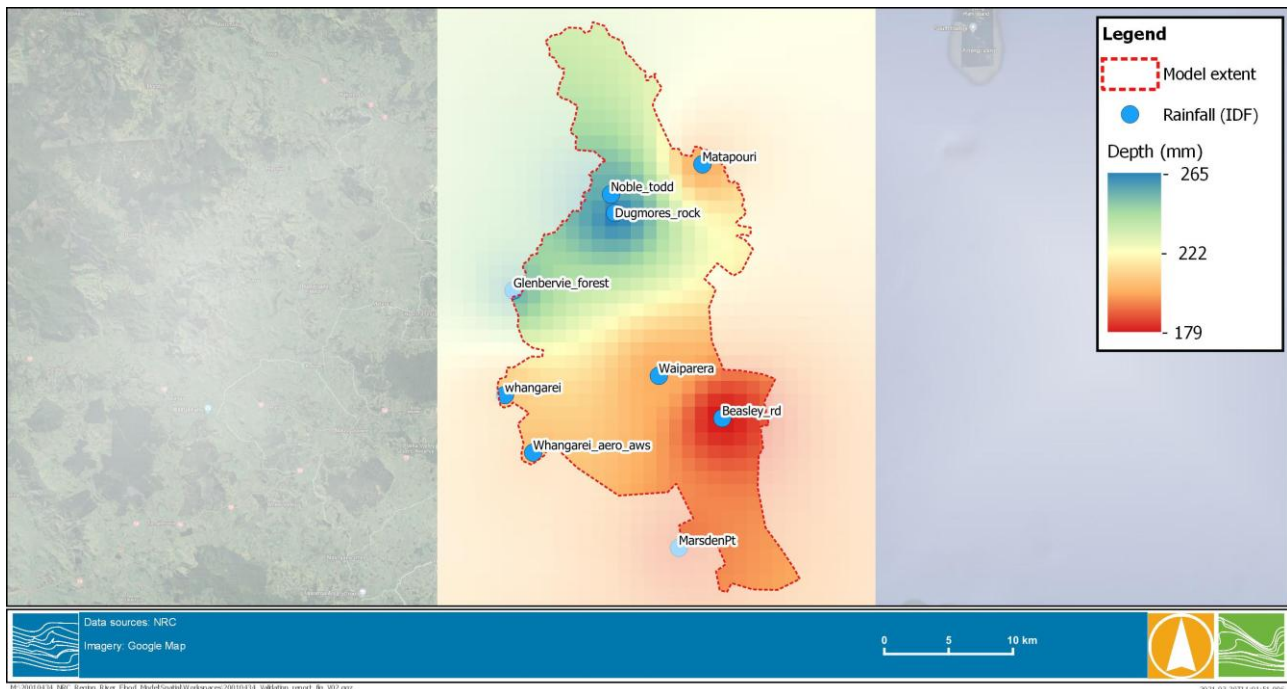


FIGURE 3-1 EXAMPLE OF DESIGN RAINFALL GRID (12-HOUR, 1% AEP RAINFALL) FOR M05

3.2.2 Design Rainfall Temporal Patterns

Design temporal patterns (rainfall hyetographs) were provided by NRC for design modelling. These were developed by HIRDS and subsequently reviewed as part of a project undertaken by Macky & Shamseldin (2020)². The project aimed to provide multiple design hyetographs and a better representation of rainfall variability across the Northland region, replacing the single set of design hyetographs previously developed.

The HIRDS design temporal pattern is recommended for design modelling of Northland catchments². Hence, the design hyetographs for the rainfall gauges were developed using the rainfall IDF data at available rainfall gauges for the catchment. Although a 12-hour hyetograph is suitable for design modelling for most Northland catchments as suggested², a range of durations were selected; including 1-hour, 6-hour, 12-hour and 24-hour for each design event, including 10%, 2% and 1% AEP events to ensure that the event critical duration was identified across the catchment. The shorter durations were critical in the upper parts of the catchment, while the longer 24-hour durations were critical in the lower catchment, where flood volumes are generally the predominant factor in generating peak flood levels.

Table 3-2 summarises the 1% AEP rainfall depth (based on IDF from HIRDSV4) for different event durations at each rainfall gauge and Figure 3-2 shows the design cumulative rainfall across the different gauges for the 12-hour duration event. Considering a single temporal pattern is assigned (i.e. HIRDS hyetograph), the proportional amount of rainfall applied through time for a given duration (e.g., 6-hour) is generally consistent (as shown in Figure 3-2) across the catchment area.

² Macky & Shamseldin (2020) - Northland Region-wide Hyetograph review



TABLE 3-2 1% AEP DESIGN RAINFALL DEPTH

Gauge location	1% AEP (mm)			
	1-hour	6-hour	12-hour	24-hour
Hatea at Glenbervie Forest_546301	72	185	253	329
Matapouri_A54551	75	160	202	247
Ngunguru at Dugmores Rock_546416	76	199	268	341
Ngunguru_at_Noble_Todd_546413	75	190	254	326
PARUA BAY BEASLEY RD_A54753	70	145	179	213
WAIPARERA_A54742	71	156	202	252
Whangarei_A54732	68	158	209	266
Whangarei_aero_aws_A54737	66	155	206	264
Whangarei_harbour_at_MarsdenPt_548215	70	155	193	230

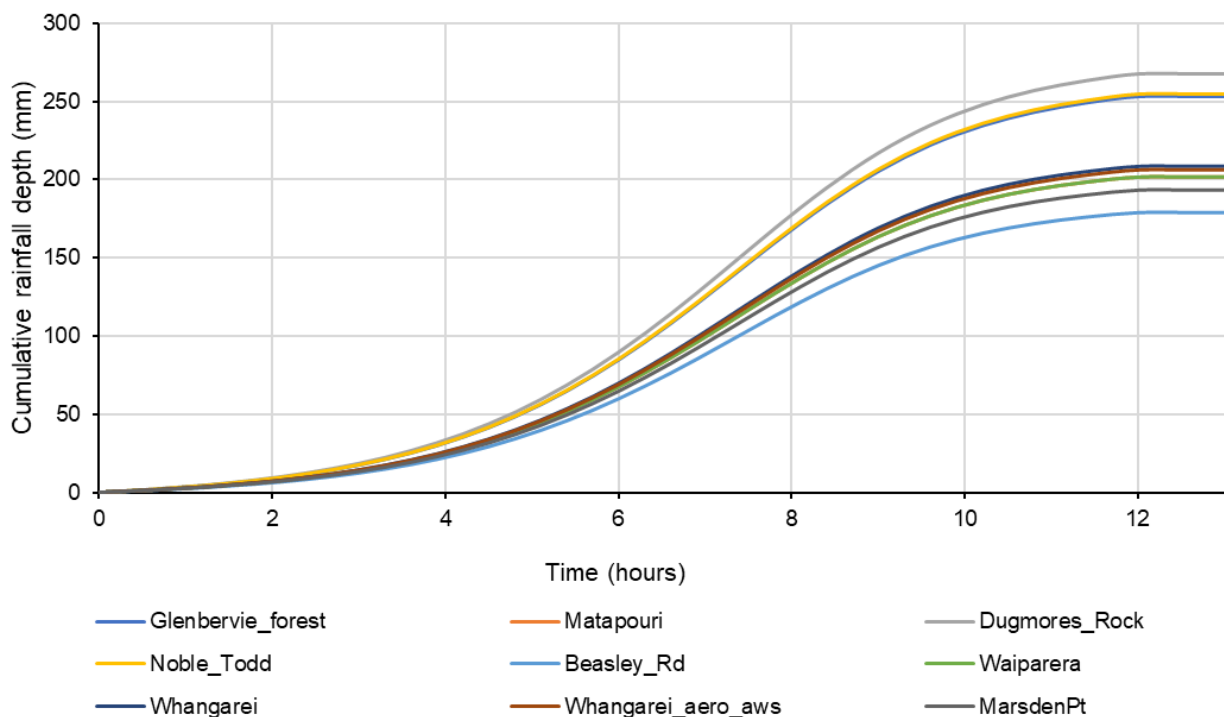


FIGURE 3-2 TEMPORAL PATTERN FOR DESIGN RAINFALL OF 12-HOUR, 1% AEP EVENT

A climate change scenario (for the 1% AEP events) was modelled for the 2081-2100 timeframe, for the RCP 8.5. This is based on the increases in rainfall intensity of 35%, 30%, 26% and 22% respectively for 1-hour, 6-hour, 12-hour and 24-hour duration events.

3.2.3 Losses

Each model cell was assigned a Manning's "*n*" (surface roughness), initial loss and a continuing loss based on land use types and importantly hydrological characteristics. Table 3-3 summarises the adopted roughness



and loss parameters. It should be noted these parameters were adopted based on the calibration to a historic event where streamflow gauges were present in other Whangarei District catchments (i.e. M01, M13, M14 and M15). Figure 3-3 displays the roughness layer based on the land use type, showing most land use is forest and grassland.

TABLE 3-3 DESIGN MODEL PARAMETERS

Hydrological areas	Land use types	Manning's n	Initial loss (IL) – mm	Continuing loss (CL) – mm/hr
Entire M05 catchment	Forest	0.08	34	5.3
	Grassland	0.06	34	5.3
	Cropland – perennial	0.04	20	2
	Cropland – annual	0.04	20	2
	Wetland – open water	0.04	0	0
	Wetland – vegetated	0.05	10	1
	Urban areas	0.10	5	1.5
	Waterways	0.06	0	0
	Other	0.06	15	1.5

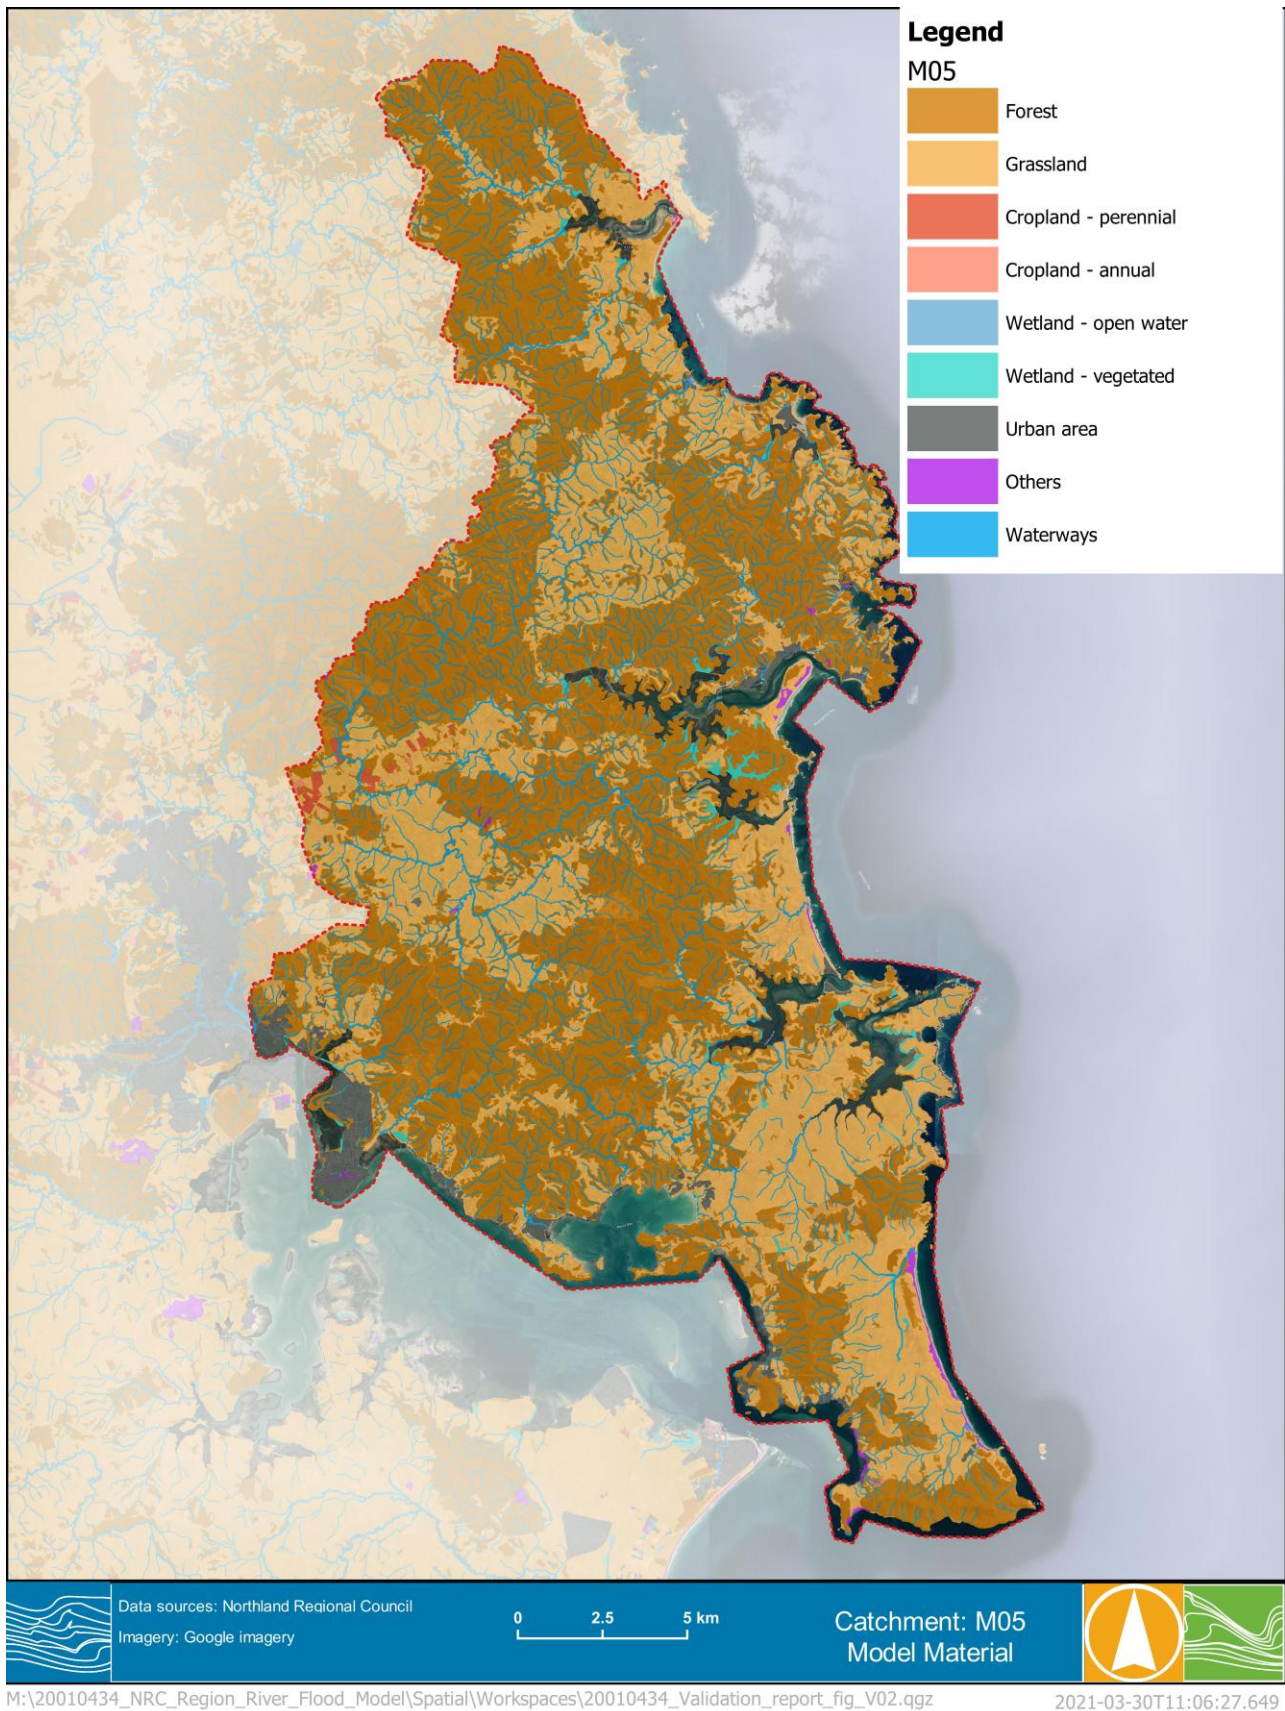


FIGURE 3-3 HYDRAULIC MODEL MATERIAL LAYER



3.2.4 Boundaries

As the Whangarei Tutukaka & Horahora catchment is a coastal catchment, a static tail-water (i.e. 1396 mm OTP) outflow boundary based on the 2 year ARI tide level³ at Marsden Point was used for the design modelling. A 1.2 m sea level rise was adopted for climate change runs based on the project brief.

There is no upstream inflow coming from upstream catchments applied in this catchment model.

³ MWH, 2010 *Priority Rivers – Flow Assessment, Sea Level Rise and Storm Surge*, prepared for Northland Regional Council



4 MODELLING RESULTS

4.1 Modelled Result Processing/Filtering

Design modelling consisted of running the model for four storm durations (1-hour, 6-hour, 12-hour and 24-hour) with the results enveloped for each design event (i.e. 1%, 2% and 10% AEP) to ensure the critical duration was well represented across each part of the catchment. Each model run produced gridded results, including depth, water surface elevation (WSE), flood hazard (Z0) and velocity. Several post-processing steps were required to produce the final design modelling outputs. These are described as follows:

Step 1:

- The modelling results are firstly merged to produce a single data set for each AEP from the storm durations modelled. For example, the flood depth output is produced by merging the depth results of the four different durations within each AEP. This allows for the critical storm duration across each part of the catchment to be represented (i.e. the short intense storms in upper reaches and longer duration storms in the lower parts of the catchment).

Step 2:

- The maximum gridded results are then remapped to a finer DEM grid using LiDAR data resampled to a 5-m grid resolution. This allows the flood extent to be more accurately displayed on the map and the higher resolution gridded results (i.e. same resolution as the 5-m DEM) to be produced.

Step 3:

- Finally, the remapped results are post-processed by filtering out depths below 100mm and puddle areas less than 2000m² as agreed with NRC.

Figure 4-1, Figure 4-2 and Figure 4-3 respectively show the final post-processed flood depths, velocity and hazard of the 1% AEP design event modelled for M05. Figure 4-4 shows the flood depth map zoomed in at Pataua North as an example. It is noted that the hazard classification is based on the following criteria:

TABLE 4-1 FLOOD HAZARD CLASSIFICATION

Hazard classification	Hazard – VxD (m ² /s)
Low	< 0.2
Low to Moderate	0.2 to 0.4
Moderate	0.4 to 0.6
Moderate to High	0.6 to 0.84
High	> 0.84

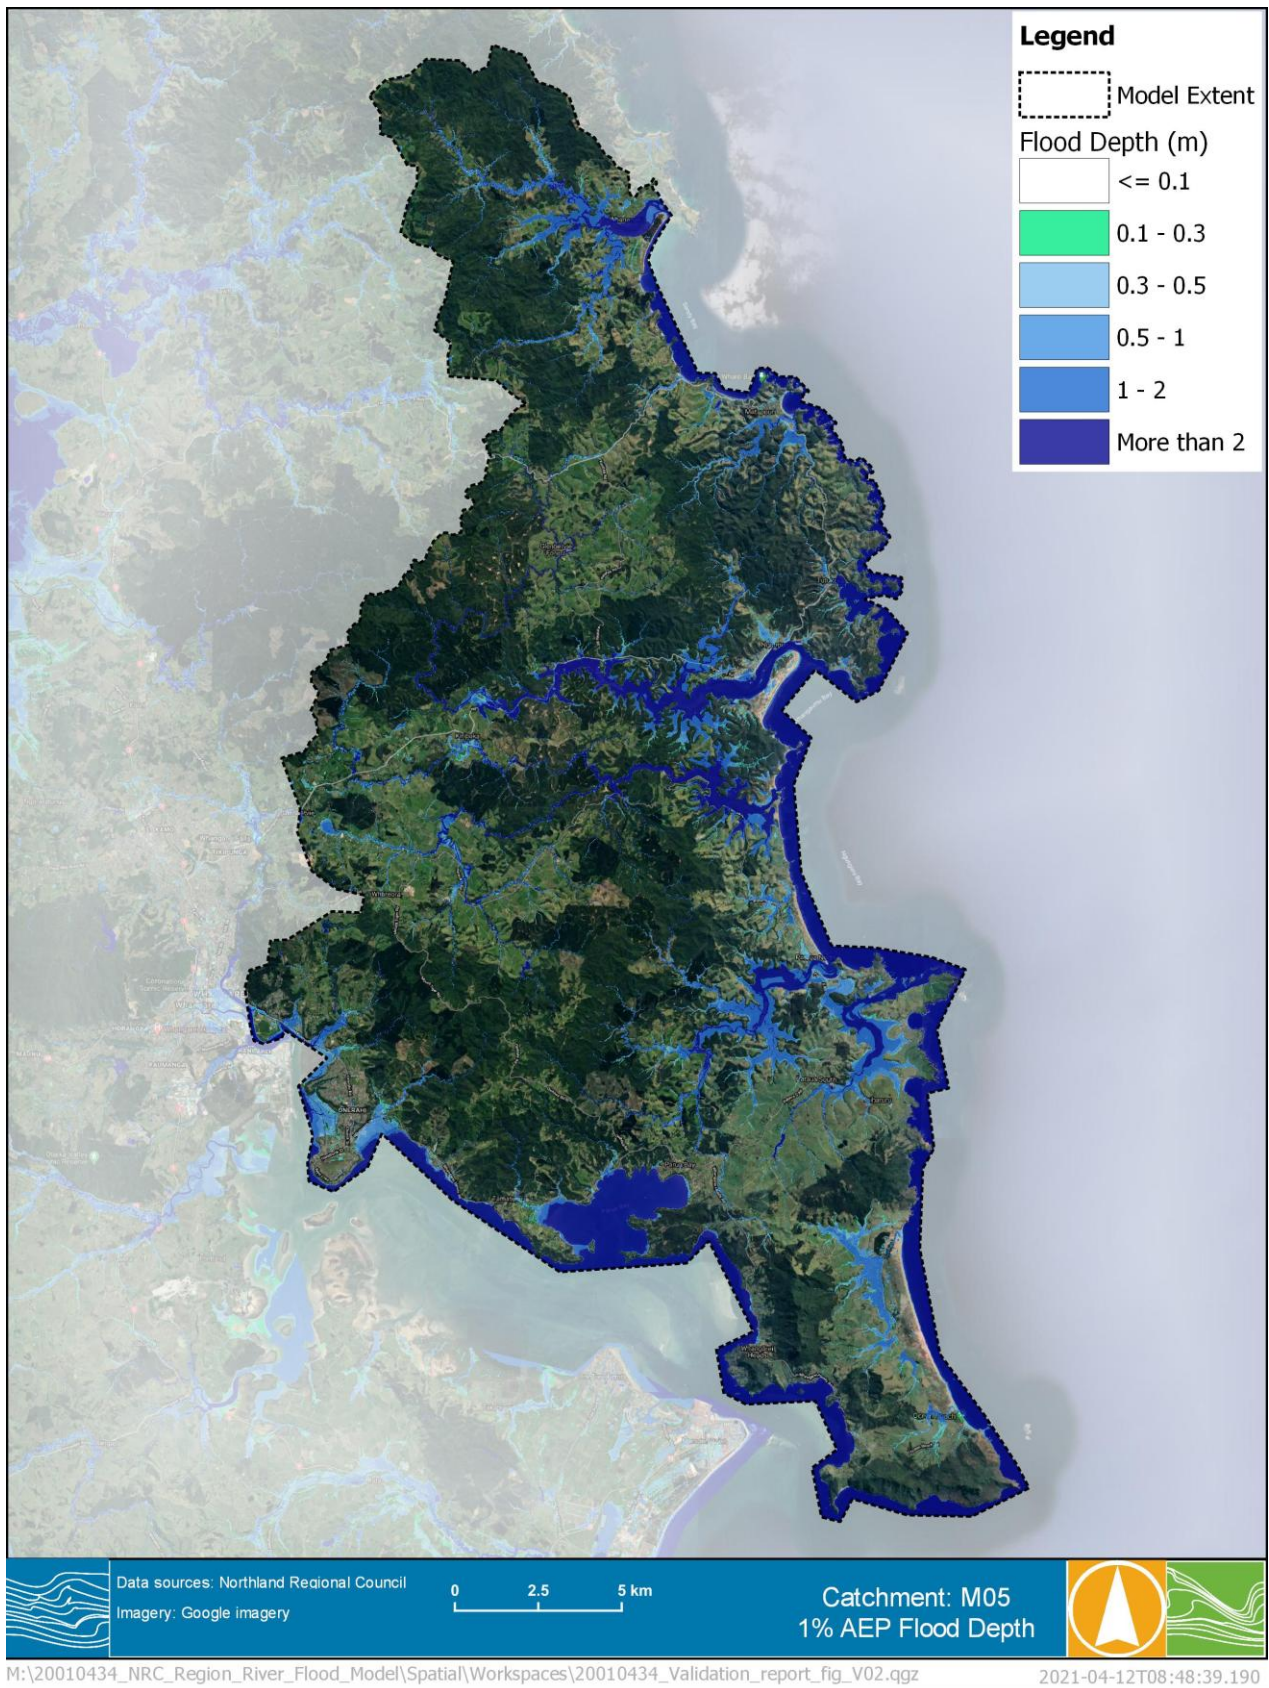


FIGURE 4-1 DESIGN MODELLING OF 1% FLOOD DEPTH

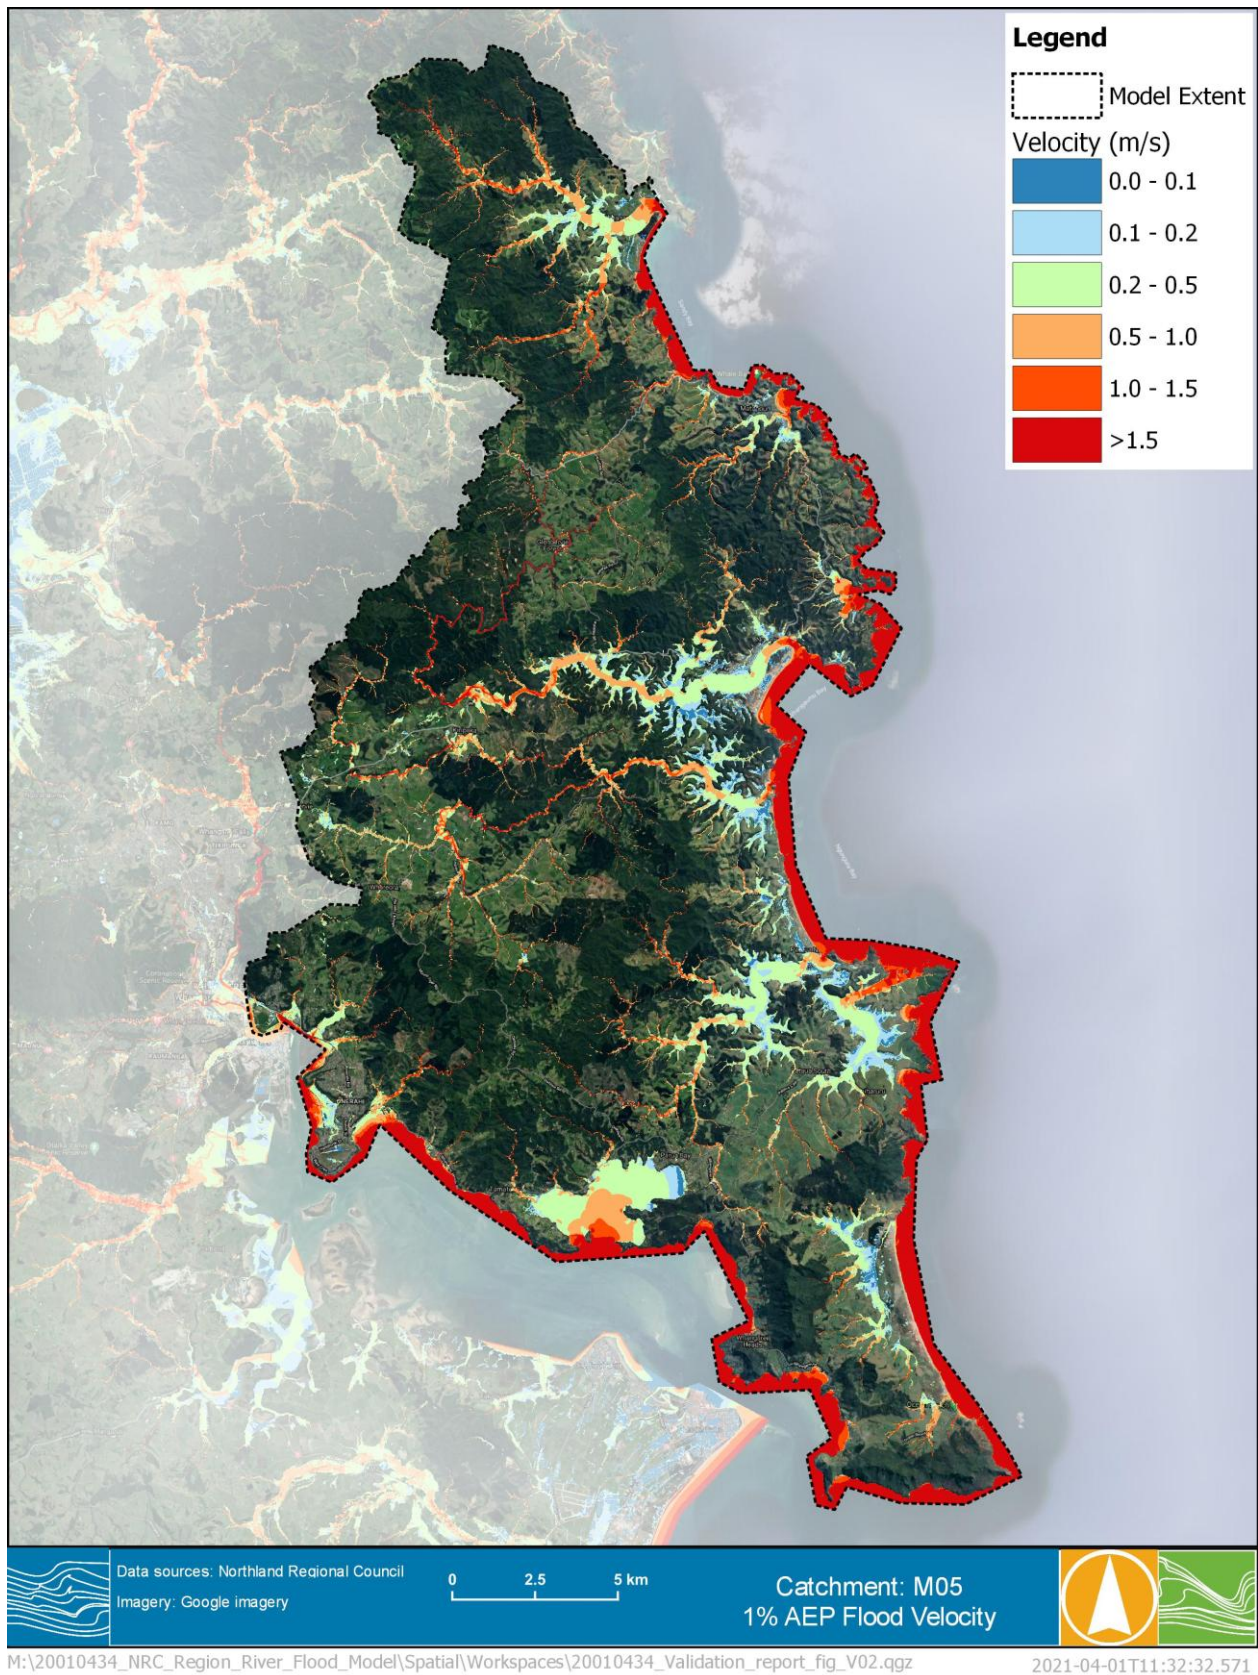


FIGURE 4-2 DESIGN MODELLING OF 1% AEP FLOOD VELOCITY

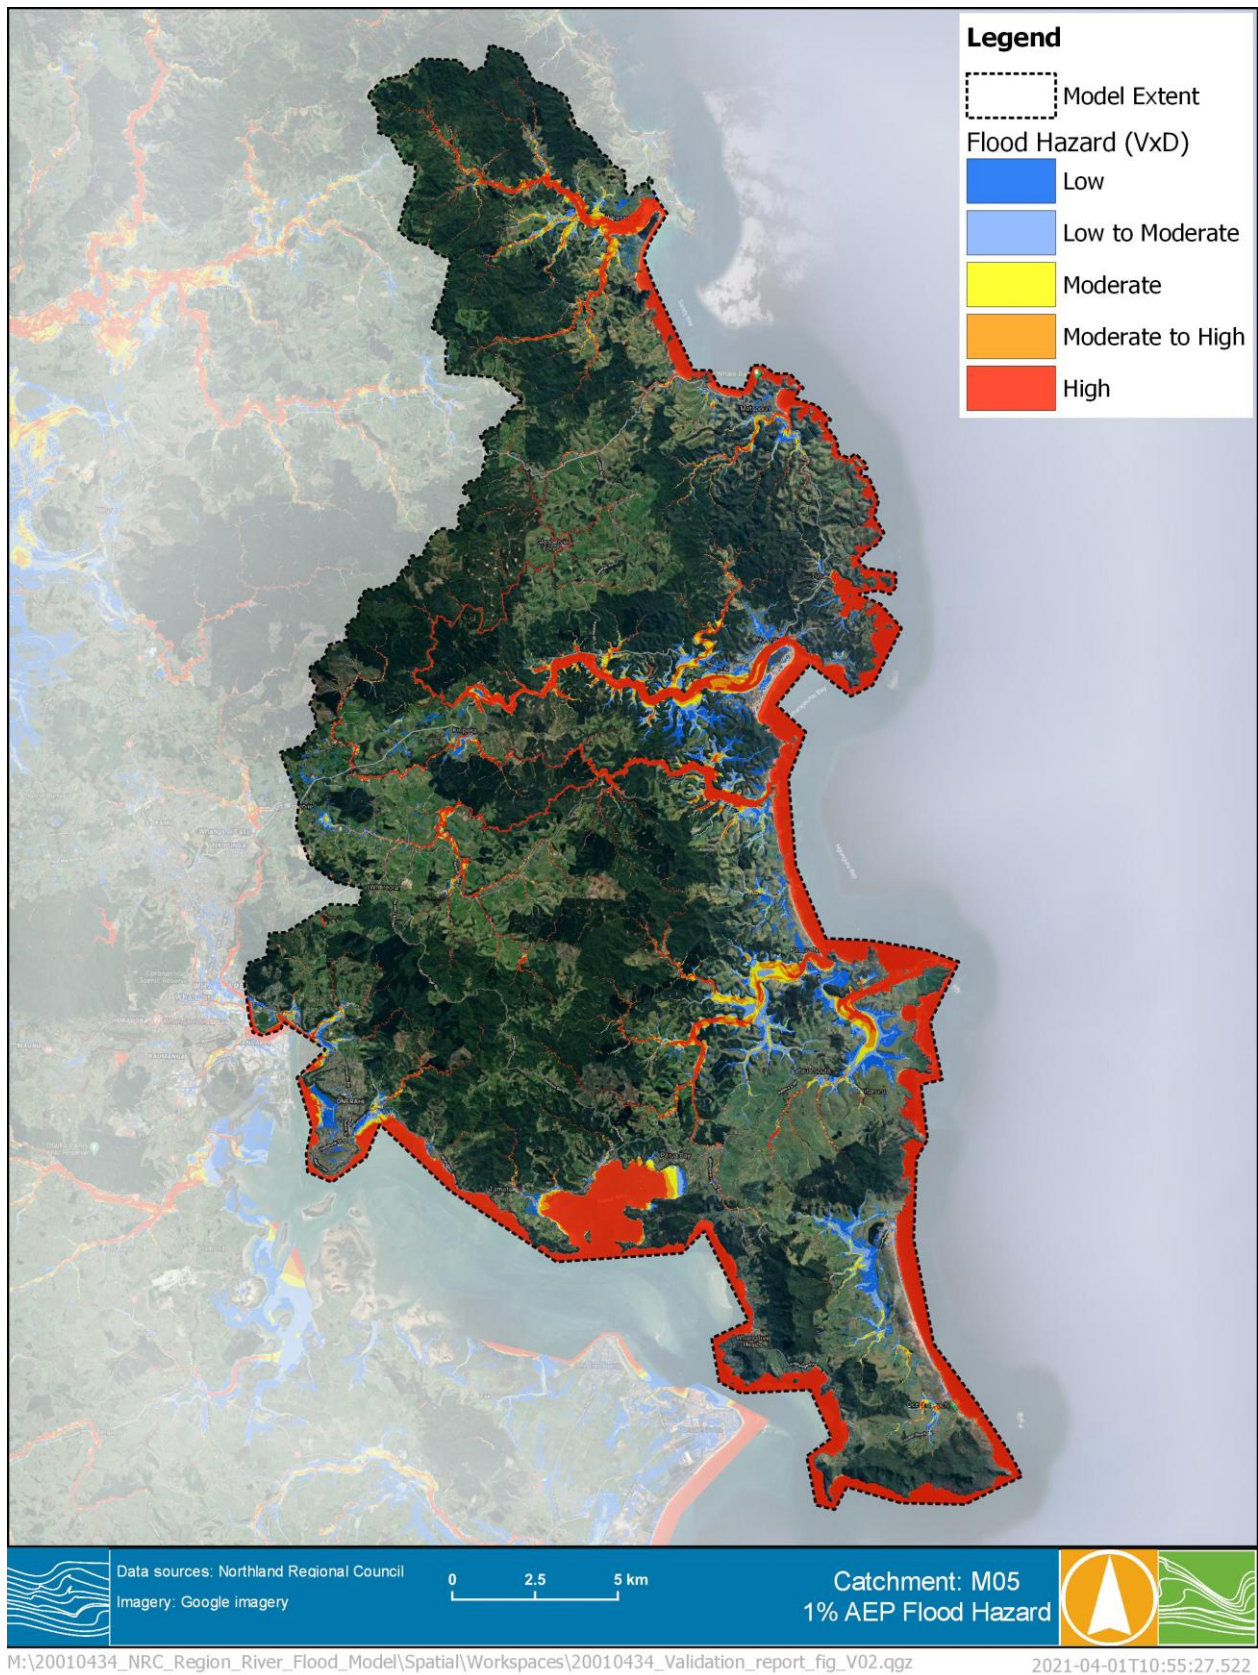


FIGURE 4-3 DESIGN MODELLING OF 1% AEP FLOOD HAZARD

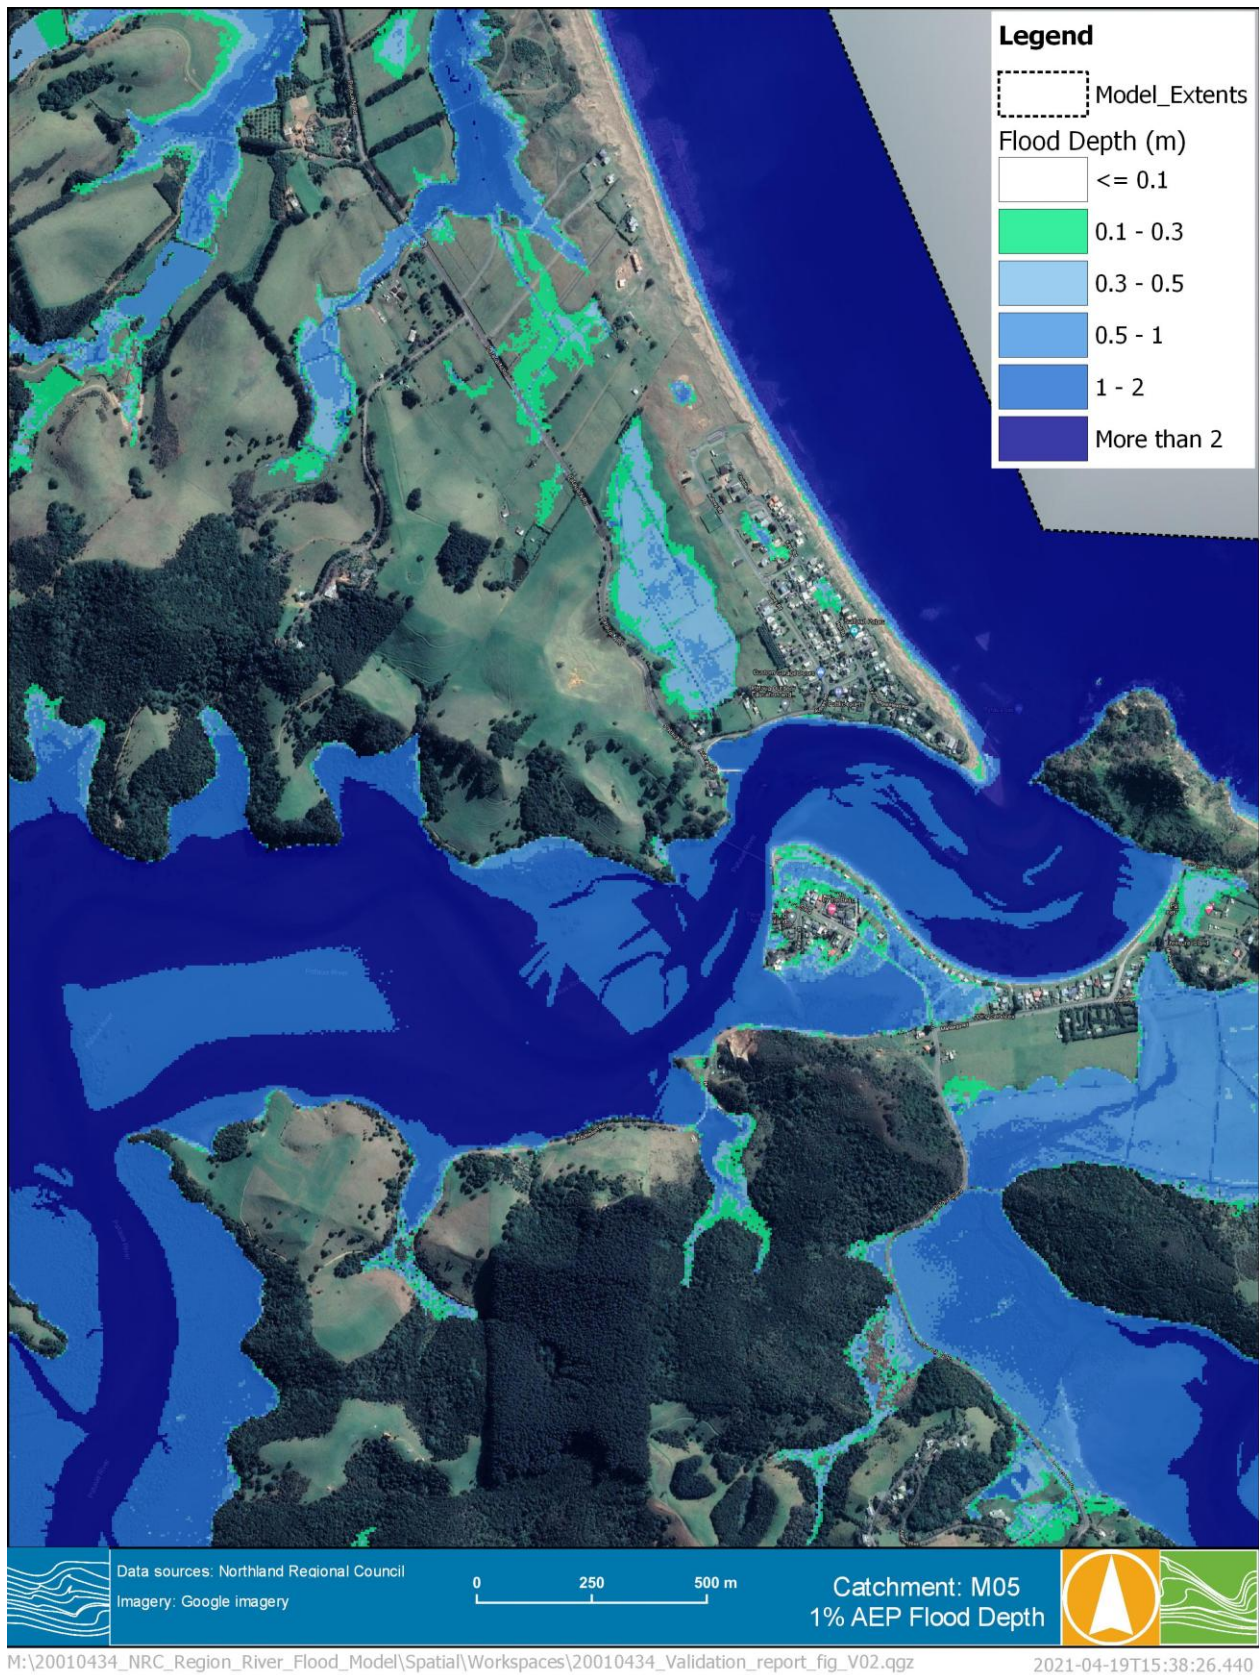


FIGURE 4-4 DESIGN MODELLING OF 1% AEP FLOOD DEPTH ZOOMED AT PATAUA



5 VERIFICATION OF DESIGN FLOWS

Flow lines were included at several waterways in the hydraulic model as 2D Plot Outputs (2D PO) for design events. This allows flow hydrographs and peak flows to be extracted at these locations. Figure 5-1 displays the streamflow gauges found within the Whangarei Tutukaka & Horahora catchment. It is noted that Ngunguru at Coal Hill Lane Bridge gauge has no records available and hence, it is not included in this verification.

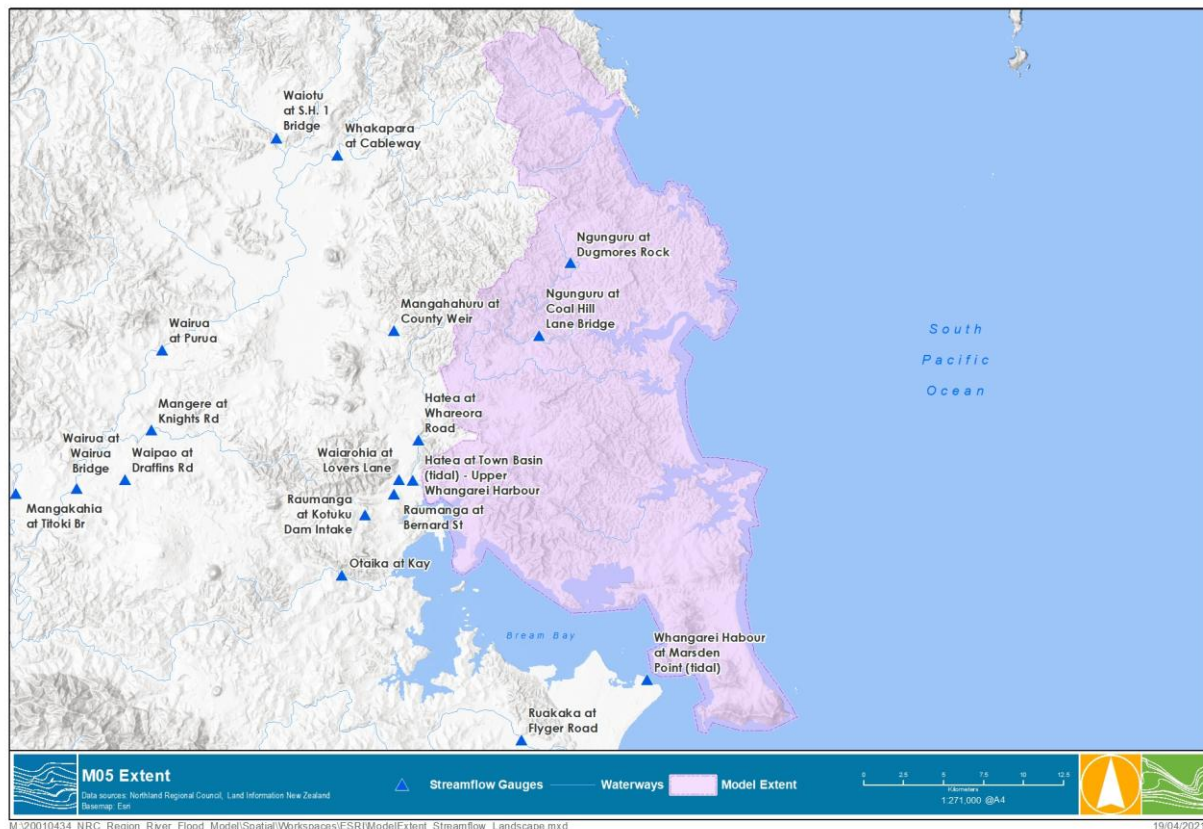


FIGURE 5-1 AVAILABLE STREAMFLOW GAUGES WITHIN WHANGAREI TUTUKAKA & HORAHORA CATCHMENT

The modelled peak flow for the 1% AEP design flood was compared with hydrological estimates, including FFA, the Rational Method and SCS Method, as well as observations from 2011 and historic maxima from streamflow gauge records.

5.1 Flood Frequency Analysis

A Flood Frequency Analysis (FFA) was undertaken for streamflow gauging stations with at least 25 years of record. The length of record for can affect the reliability of the FFA especially for the estimation of major flood events (e.g. 1% AEP). The design flow estimates provided additional verification against the design hydraulic modelling results. The streamflow gauging stations that were selected for FFA and the corresponding 1% AEP flow estimates can be found in the Calibration Report (R01).

The annual series (maximum streamflow values for each year of gauge record) were calculated and input into FLIKE. FLIKE is a software package used for FFA and provides five different probability distributions for fitting the historical records. Log Pearson III distribution is commonly used across New Zealand and south east

Australia to fit streamflow records and was used for all gauges within the study area with sufficient streamflow records. The FFA results showed that the probability distribution had a relatively good fit at all stations.

An example flood frequency curve fitting of the annual maximum streamflow values with the Log Pearson III distribution is shown in Figure 5-2. The design curve generated by the probability distribution shows a good fit with the historic records in more frequent events (i.e. 1 in 10 year or more frequent) but may slightly overestimate the design flows for rare events (e.g. 1% AEP flow). The flattening of the historic points may also suggest limitations with the current rating curves. Overall, the design curve shows a good fit with the tight confidence intervals indicating low uncertainty within these estimates.

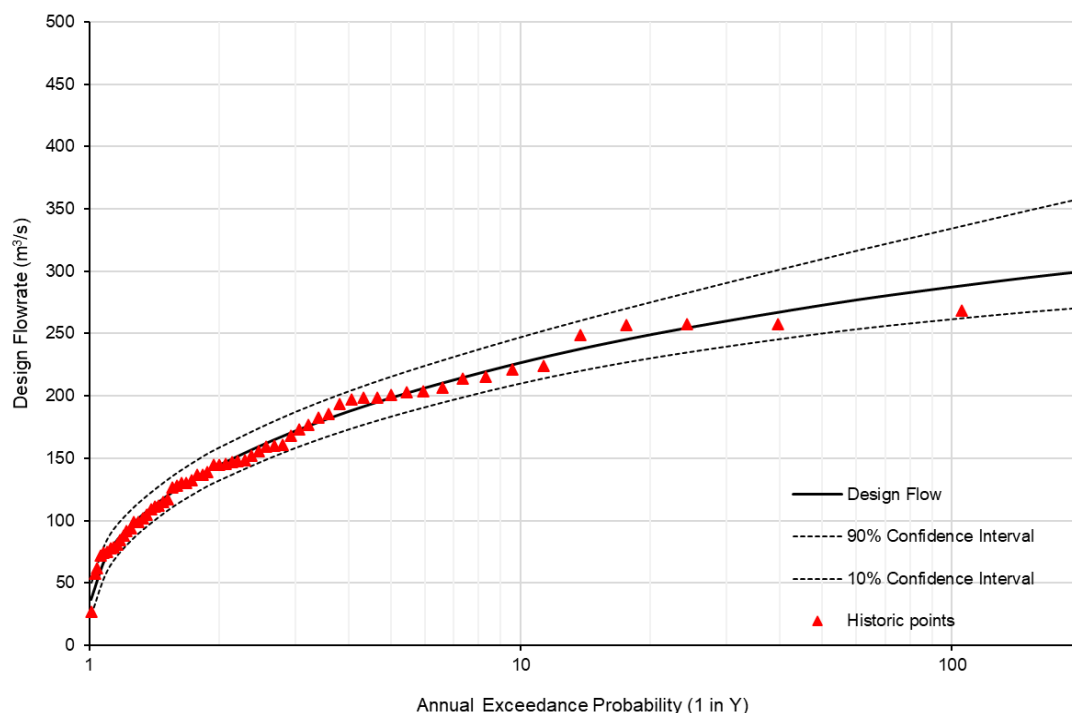


FIGURE 5-2 EXAMPLE OF FLOOD FREQUENCY CURVE OF LOG PEARSON III DISTRIBUTION FIT

5.2 Regional Estimation Methods

For catchments where a suitable streamflow gauge record was not available, additional estimation methods were used to provide design flow verification. These methods are based on empirical estimations using catchment area and design rainfall totals to estimate peak design flows. These methods were checked for each streamflow gauge location within the study area and are described below.

5.2.1 NIWA New Zealand River Flood Statistics Portal

The New Zealand River Flood Statistics portal⁴ provides peak flood estimation at streamflow gauging stations and the entire river system in New Zealand completed in 2018. The design estimates can be extracted from the portal are:

- Flood Frequency estimates (at flow gauge).
- Flood Frequency estimates, noted as Henderson & Collins 2018 (at river reach).

⁴ NIWA Flood Frequency tool, accessed via: <https://niwa.co.nz/natural-hazards/hazards/floods>



- Rational Method HIRDS V3 (at river reach).

The flood frequency estimates given by the portal are determined using the Mean Annual Flow method developed by Henderson & Collins (2018)⁵.

5.2.2 SCS method

The Soil Conservation Service (SCS) method, first developed by the U.S. Department of Agriculture's Soil Conservation Service, calculates peak flood flow based on rainfall and land-cover-related parameters. It is the recommended method for stormwater design in the Auckland region, providing a useful comparison. The peak flow equation is:

$$Q = (P - I_a)^2 / (P - I_a + S)$$

where:

- Q is run-off depth (millimetres).
- P is rainfall depth (millimetres)
- S is the potential maximum retention after run-off begins (millimetres).
- I_a is initial abstraction (millimetres), which is 5 millimetres for permeable areas and zero otherwise.

The retention parameter S (measured in millimetres) is related to catchment characteristics through:

$$S = (1000/CN - 10) 25.4.$$

The value of the curve number (CN) represents the run-off from 0 (no run-off) to 100 (full run-off) and it is influenced by soil group and land use. A CN value of 50 was used for the SCS estimation of this catchment.

The run-off depth (Q) is then converted to a peak flow rate using the SCS unit hydrograph.

5.2.3 Rational Method

The Rational Method is widely used across both New Zealand and Australia. The equation is based on catchment area and design rainfall. The equation is:

$$Q = C i A / 3.6$$

where:

- Q is the estimate of the peak design discharge in cubic metres per second
- C is the run-off coefficient
- i is rainfall intensity in mm/hr hour, for the time of concentration
- A is the catchment area in km².

⁵Henderson, R.D., Collins, D.B.G., Doyle, M., Watson, J. (2018) *Regional Flood Estimation Tool for New Zealand Final Report Part 2*. NIWA Client Report



5.3 Verification Results

Table 5-1 summarises the comparison of 1% AEP peak flow estimates with the modelled value at Ngunguru at Dugmores Rock gauge in the Whangarei Tutukaka & Horahora catchment and the differences between the estimation methods and modelled results can be visualised in Figure 5-3.

The Rational Method and the SCS method tend to underestimate the design flows when comparing with the other estimations. It is noted that both these methods are better suited for smaller catchments, with SGS limited to 12 km². The catchment size of the streamflow gauge is about 13 km². Apart from these two methods, the modelled design flow at the Ngunguru at Dugmores Rock gauge tend to sit within a reasonable range of the design flow estimates.



TABLE 5-1 SUMMARY OF 1% AEP PEAK FLOW COMPARISON

PO line location	Hydraulic model (m ³ /s)		Records at gauge (m ³ /s)		Empirical estimates (m ³ /s)			NIWA Flood Frequency Tool 2018 (m ³ /s)		
	Critical duration	Modelled peak	Jan 2011 peak	Highest on record	FFA	SCS	Rational method	NIWA – FF at gauge	NIWA – Rational method	NIWA – H&C 2018
Ngunguru at Dugmores Rock	6 hr	180.7	112.4	125.8	137.6	54.5	40.22	151	142.0	102

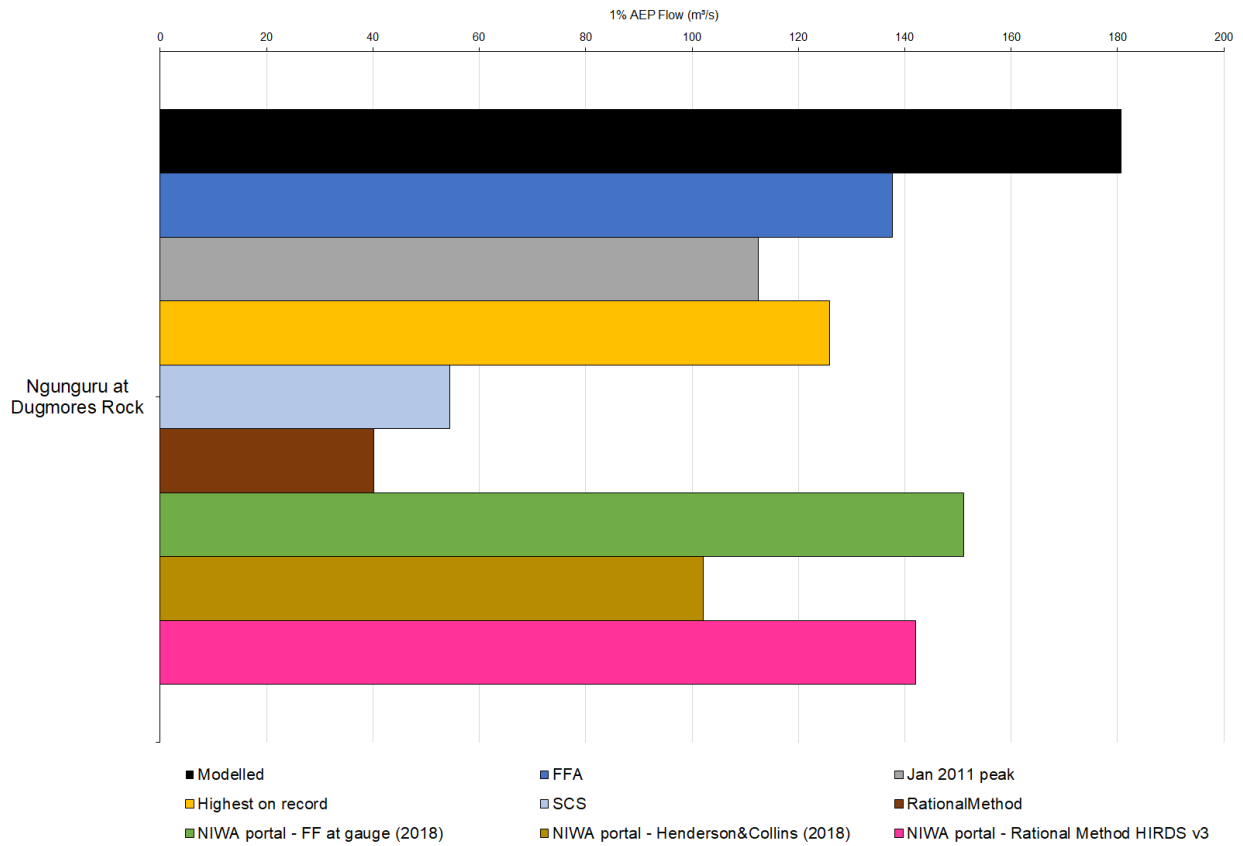


FIGURE 5-3 VERIFICATION OF DESIGN MODELLING RESULTS AGAINST HYDROLOGICAL ESTIMATES



6 SUMMARY

The Whangarei Tutukaka & Horahora catchment model (M05) was not calibrated and its model parameters were adopted based on nearby calibrated catchments (i.e. M01, M13, M14 and M15) in the Whangarei District. The design modelling of this catchment consisted of four storm durations (1-hour, 6-hour, 12-hour and 24-hour) for each design AEP (i.e. 1%, 2% and 10% AEP). Design flood extents and gridded results, including depth, water surface elevation, velocity and hazard were produced and delivered to NRC.

The modelled 1% AEP design flow at the Ngunguru at Dugmores Rock gauge was verified against several design flood estimation methods. The modelled design flow has a reasonably good match to these estimation methods and sits within a reasonable range of design estimates.

When considering the scope and the scale of this project, the current modelling results are considered fit for use. Modelling outputs can be used to identify flood hazard and potential flood risk. It can also inform planning decisions, infill flood mapping between detailed flood studies and provide a basis for broad emergency management exercises.

