


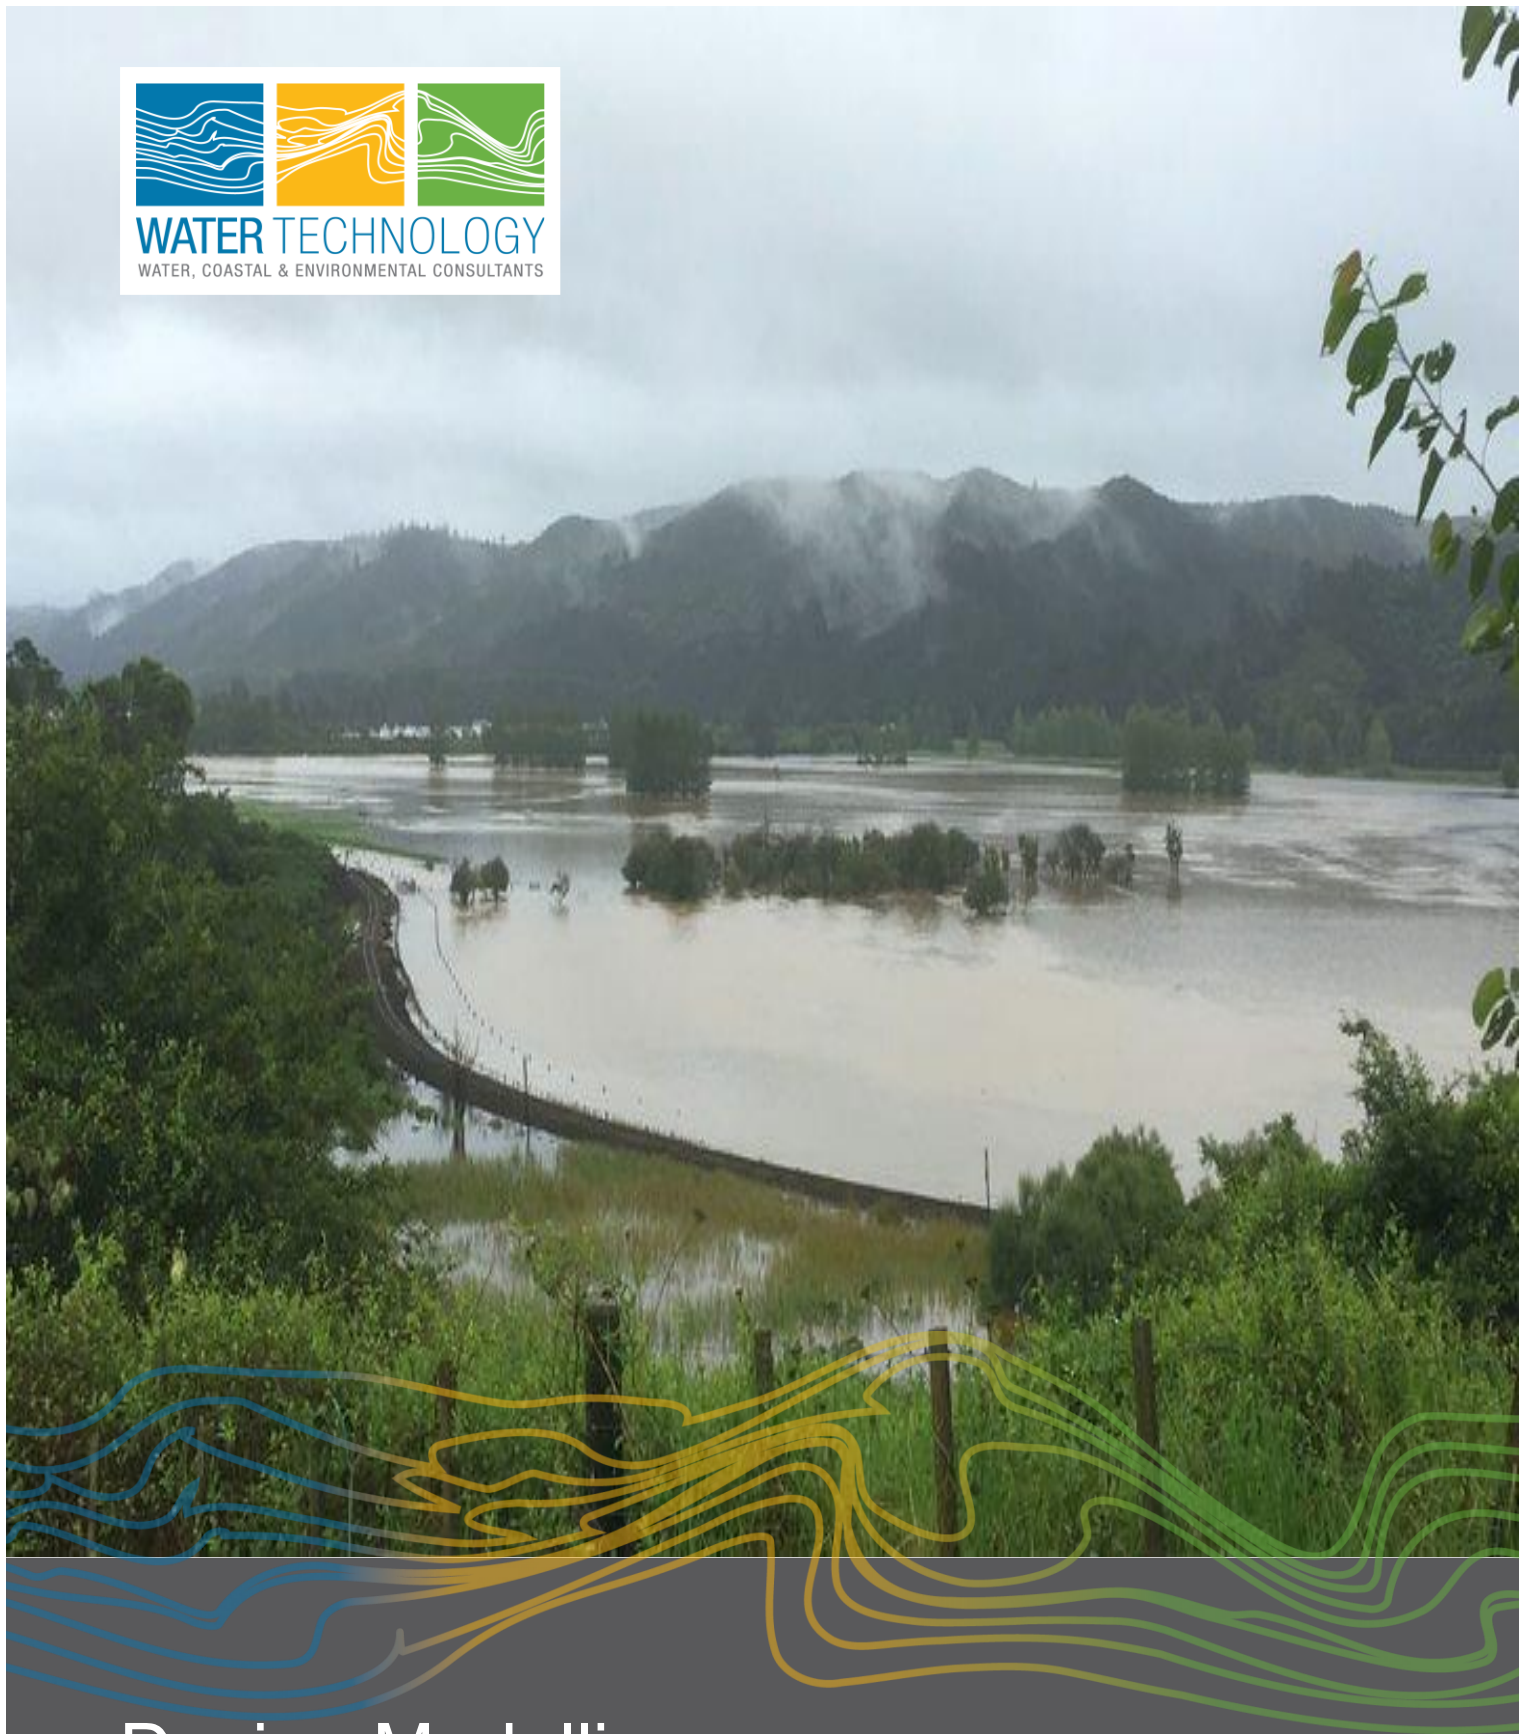

Design Modelling

Waimamaku Catchment (M03)

Northland Regional Council

16 October 2025



Document Status

Version	Doc type	Reviewed by	Approved by	Date issued
01	Draft	Lachlan Inglis	Ben Hughes	25/03/2021
02	Final	Lachlan Inglis	Ben Hughes	16/10/2025

Project Details

Project Name	Waimamaku Catchment (M03)
Client	Northland Regional Council
Client Project Manager	Sher Khan & Matt De Boer
Water Technology Project Manager	Bertrand Salmi
Water Technology Project Director	Ben Hughes
Authors	Alvin Mingjun Li, Lachlan Inglis
Document Number	M03_20010434_R02V02_Validation_Report



Cover Photo: Helen Beech (<https://www.rnz.co.nz/news/national/350285/flooding-in-northland-forces-school-and-road-closures>)

COPYRIGHT

Water Technology Pty Ltd has produced this document in accordance with instructions from Northland Regional Council for their use only. The concepts and information contained in this document are the copyright of Water Technology Pty Ltd. Use or copying of this document in whole or in part without written permission of Water Technology Pty Ltd constitutes an infringement of copyright.

Water Technology Pty Ltd does not warrant this document is definitive nor free from error and does not accept liability for any loss caused, or arising from, reliance upon the information provided herein.

6 Churchill Place
Cambridge New Zealand 3434
Telephone +64 27 777 0989
NZBN 94290481 881 80





CONTENTS

1	PROJECT OVERVIEW	4
2	STUDY AREA	6
3	CALIBRATION RESULTS	8
4	DESIGN MODELLING	10
4.1	Overview	10
4.2	Model Parameters	10
4.2.1	Rainfall Intensity-Duration-Frequency	10
4.2.2	Design Rainfall Temporal Patterns	11
4.2.3	Losses	12
4.2.4	Boundaries	15
5	MODELLING RESULTS	16
5.1	Modelled Result Processing/Filtering	16
6	VERIFICATION OF DESIGN FLOWS	21
6.1	Regional Estimation Methods	21
6.1.1	NIWA New Zealand River Flood Statistics Portal	22
6.1.2	SCS method	22
6.1.3	Rational Method	22
6.2	Verification Results	24
7	SUMMARY	27

LIST OF FIGURES

Figure 1-1	Model delineation	5
Figure 2-1	Study area	7
Figure 3-1	Modelled and gauged hydrograph at Kaeo at Waitemarama at U/S of FNDC intake gauge	9
Figure 4-1	Example of design rainfall grid (12-hour, 1% AEP rainfall) for M03	11
Figure 4-2	Temporal pattern for design rainfall of 12-hour, 1% AEP event	12
Figure 4-3	Hydraulic model material layer	14
Figure 5-1	Design modelling of 1% flood depth	17
Figure 5-2	Design Modelling of 1% AEP flood velocity	18
Figure 5-3	Design modelling of 1% AEP Flood hazard	19
Figure 5-4	Design modelling of 1% AEP flood depth zoomed at a township	20
Figure 6-1	Available streamflow gauges within Waimamaku catchment	21
Figure 6-2	Verification of design modelling results against hydrological estimates	26

LIST OF TABLES

Table 3-1	Summary of calibration results for catchment model 03	8
Table 3-2	Quantitative assessment of January 2011 calibration for catchment model 03	8
Table 4-1	Key Modelling Information	10
Table 4-2	1% AEP Design rainfall depth	12



Table 4-3	Design model parameters	13
Table 5-1	Flood hazard classification	16
Table 6-1	Summary of 1% AEP peak flow comparison	25



1 PROJECT OVERVIEW

Overview

Water Technology was commissioned by Northland Regional Council (NRC) to undertake a region-wide flood modelling study. The study area encompassed the entire Northland Regional Council area which covers an area of over 12,500 km², with the exclusion offshore islands. The aim of this project was to map riverine flood hazard zones across the entire Northland region and update existing flood intelligence.

Modelling approach

This project used a 2D Direct Rainfall (also known as Rain on Grid) approach for hydraulic modelling and has provided flood extents for a defined range of design storms. The hydraulic modelling software TUFLOW was used. TUFLOW is a widely used software package suitable for the analysis of flooding. TUFLOW routes overland flow across a topographic surface (2D domain) to create flood extent, depth, velocity and flood hazard outputs that can be used for planning, intelligence and emergency response. The latest release of TUFLOW offers several recent advanced modelling techniques to improve modelling accuracy which where practical, were tested and adopted in this project.

This study delineated and modelled 19 catchments, shown in Figure 1-1. To validate the adopted methodology and model parameters used in the design modelling, 9 catchments were calibrated against recent (and historic) flood events. The calibration/validation methodology is documented in a standalone report *NRC Riverine Flood Mapping - Calibration Report – R01* and is referred to throughout this document as the *Calibration Report*.

This report documents the calibration results and design modelling methodology for Waimamaku Catchment (M03), noting that this catchment was calibrated to the June 2020 flood event.

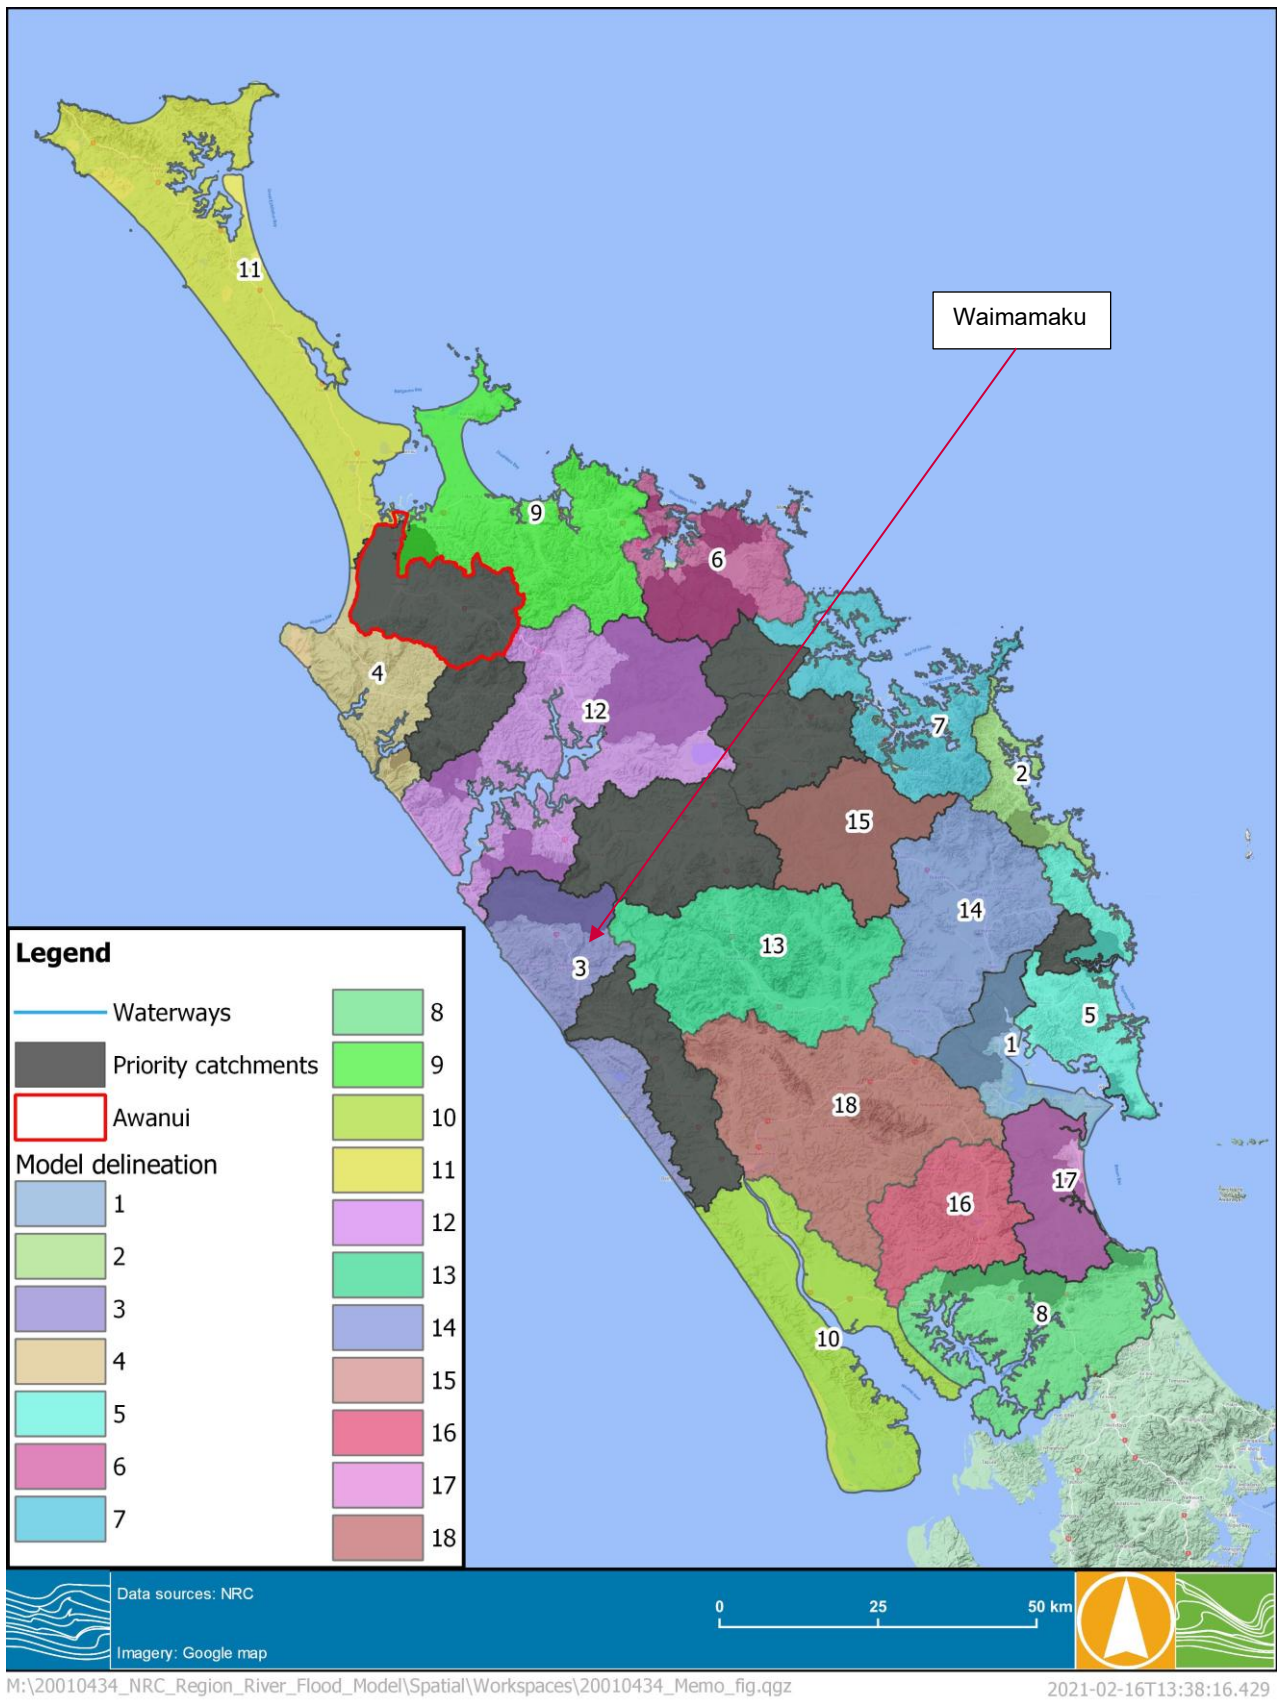


FIGURE 1-1 MODEL DELINEATION



2 STUDY AREA

The model 03 catchment is coastal catchment, covering a total area of approximately 476 km². The Waimamaka River and Waipoua River are two major waterways within the catchment. Both rivers discharge into the ocean to the west of the catchment. Figure 2-1 displays the study area of the catchment model 03.



FIGURE 2-1 STUDY AREA



3 CALIBRATION RESULTS

The detail methodology of model calibration should refer to the *Calibration Report*. This section documents the final model calibration results and its performance.

Waiotemarama U/S of FNDC intake gauge is the only streamflow gauge found available within the catchment. This gauge has both flow and water level records. There is no gauge zero and the model could not be calibrated against recorded flood levels. This model calibration therefore relied on matching the modelled flows to the gauged flows.

The calibration focused on calibrating the model to the rainfall event between 23rd June to 25th June in 2020. Table 3-1 summarises the comparison between the observed and modelled values and Table 3-2 shows the quantitative assessment of the calibration performance. Figure 3-1 shows the modelled flows compared to the gauged records.

The modelled peak flow is close to the gauged record with around 12% difference, but the timing is around 3 hours earlier than that observed. The modelled flood volume is also close to the recorded total volume during the event.

Based on the calibration result, the model calibration for the catchment appears suitable and fit for purpose.

TABLE 3-1 SUMMARY OF CALIBRATION RESULTS FOR CATCHMENT MODEL 03

Location	Peak flow (m ³ /s)			Time to peak diff. (hour)	Volume (ML)			Peak WSE (m OTP)		
	Modelled	Gauged	Diff.		Modelled	Gauged	Diff.	Modelled	Gauged	Diff. (mm)
Waiotemarama at U/S of FNDC intake	13.89	15.84	-12.3%	-3.25	212.75	220.18	-3.4%	130.71	N/A	N/A

TABLE 3-2 QUANTITATIVE ASSESSMENT OF JANUARY 2011 CALIBRATION FOR CATCHMENT MODEL 03

Location	Peak flow within 15% of recorded (Y/N)	Volume within 15% of recorded (Y/N)	Peak WSE within 300mm of recorded (Y/N)	Timing to peak within +/- 1 hour	Model flow within 10% of recorded flow at the same stage (Y/N)
Waiotemarama at U/S of FNDC intake	Y	Y	N/A	N	N/A

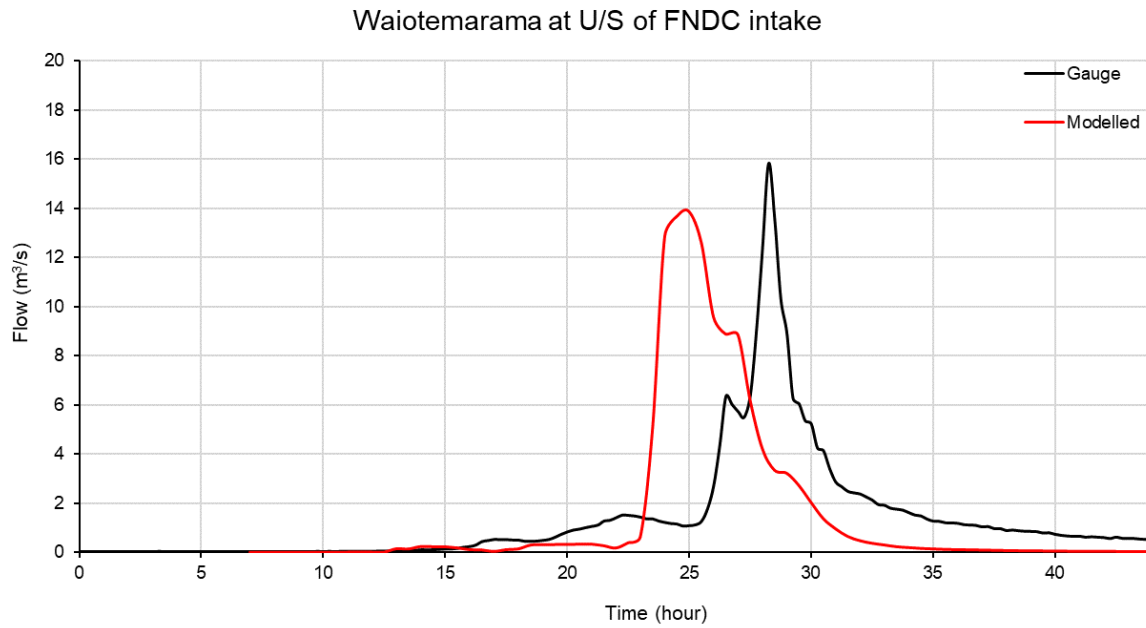


FIGURE 3-1 MODELLED AND GAUGED HYDROGRAPH AT KAEO AT WAIOTEMARAMA AT U/S OF FNDC INTAKE GAUGE



4 DESIGN MODELLING

4.1 Overview

A hydraulic model (TUFLOW) of the Waimamaku catchment (M03) was constructed to model overland flooding. A range of storm durations were run and results for each Annual Exceedance Probability (AEP) event were enveloped to ensure the critical duration was well represented across each part of the study area. The merged results captured the maximum flood level and depth of the range of design event durations modelled.

Table 4-1 and the following sections detail the key modelling information used in the development of the hydraulic model.

TABLE 4-1 KEY MODELLING INFORMATION

Terrain data	NRC 1m LiDAR without filling of sinks but includes the “burning of creek alignments’ through embankments
Model type	Direct rainfall model
Model build	Build: 2020-10-AA-iSP-w64
Rainfall	See Sections 4.2.1 and 4.2.4
Losses	See Section 4.2.3
Boundaries	See Section 4.2.4
Modelling solution scheme	TUFLOW HPC (adaptive timestep)
Modelling hardware	GPU
Modelling technique	Sub-grid-sampling (SGS)
Model grid size	10m with 1m SGS

4.2 Model Parameters

A range of model parameters were adopted based on the calibration of the June 2020 event. Details of these are outlined below.

4.2.1 Rainfall Intensity-Duration-Frequency

Design rainfall totals for durations from 10 minute up to 120 hours were developed for design modelling. This was undertaken at 179 rainfall gauge sites across the wider study area. These Intensity-Duration-Frequency (IDF) tables were developed by NIWA through the High Intensity Rainfall Design System (HIRDSV4)¹. A range of magnitude events from 1 in 1.58 ARI through to 1 in 250 ARI along with climate change predictions (Regional Concentration Pathway 4.6, 6 & 8.5) up to 2100. For this catchment, 7 rainfall gauges were used with a spatially weighted grid of rainfall totals created for design modelling. Figure 4-1 shows the 12-hour cumulative rainfall grid for the 1% AEP event along with the rainfall gauge locations used to create the grid.

¹ Accessed via <https://hirds.niwa.co.nz/>

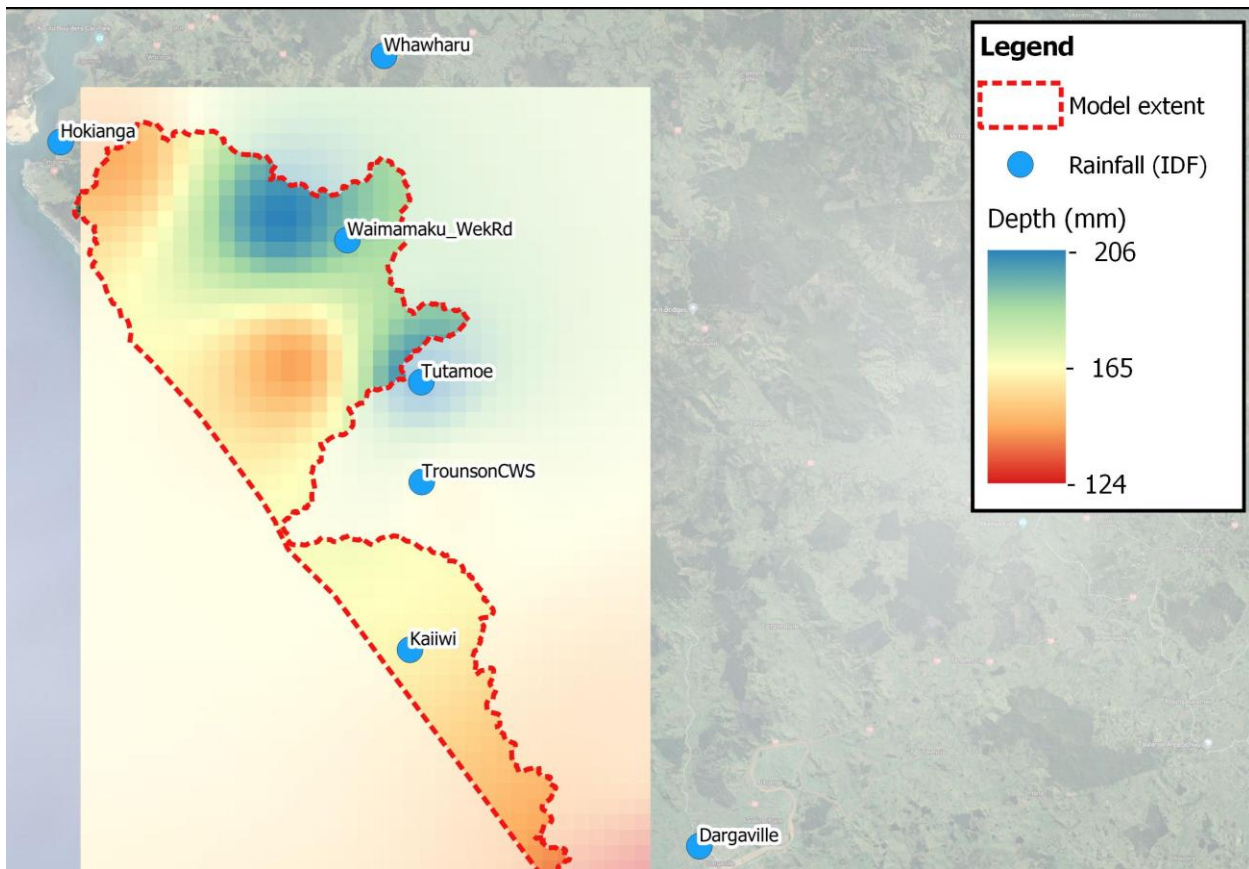


FIGURE 4-1 EXAMPLE OF DESIGN RAINFALL GRID (12-HOUR, 1% AEP RAINFALL) FOR M03

4.2.2 Design Rainfall Temporal Patterns

Design temporal patterns (rainfall hyetographs) were provided by NRC for design modelling. These were developed as part of a previous project undertaken by Macky & Shamseldin (2020)². The project aimed to provide multiple design hyetographs and a better representation of rainfall variability across the Northland region, replacing the single set of design hyetographs previously developed.

The HIRDS design temporal pattern is recommended for design modelling of Northland catchments². Hence, the design hyetographs for the rainfall gauges were developed using the rainfall IFD data at available rainfall gauges for the catchment. Although a 12-hour hyetograph is suitable for design modelling for most Northland catchments as suggested², a range of durations were selected; including 1-hour, 6-hour, 12-hour and 24-hour for each design event, including 10%, 2% and 1% AEP events to ensure that the event critical duration was identified across the catchment. The shorter durations were critical in the upper parts of the catchment, while the longer 24-hour durations were critical in the lower catchment, where flood volumes are generally the predominant factor in generating peak flood levels.

Table 4-2 summarises the 1% AEP rainfall depth (based on IFD from HIRDSV4) for different event durations at each rainfall gauge and Figure 4-2 shows the design rainfall temporal patterns across different gauges for the 12-hour duration event. Considering a single temporal pattern is assigned (i.e. HIRDS hyetograph), the proportional amount of rainfall applied through time for a given duration (e.g., 6-hour) is generally consistent (as shown in Figure 4-2) across the catchment area.

² Macky & Shamseldin (2020) - Northland Region-wide Hyetograph review



TABLE 4-2 1% AEP DESIGN RAINFALL DEPTH

Gauge location	1% AEP (mm)			
	1-hour	6-hour	12-hour	24-hour
Dargaville RAWS (O00820)	43	93	121	154
Mamaranui (A53881)	49	113	149	190
Waima at Tutamoe (536613)	61	149	206	276
Waiotemarama (A53541)	50	110	145	188
Waipoua Visitor Centre (A53651)	47	108	143	185
Wekaweka (A53551)	55	148	206	278
Whatoro2 (A53761)	51	120	162	213

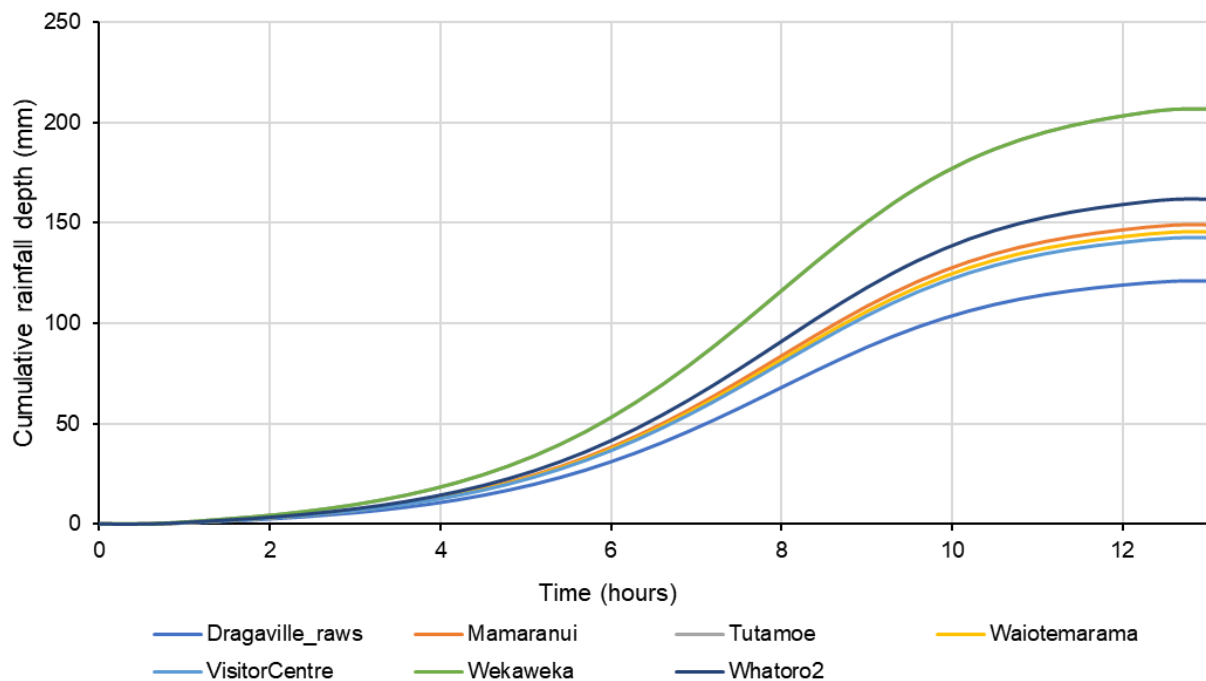


FIGURE 4-2 TEMPORAL PATTERN FOR DESIGN RAINFALL OF 12-HOUR, 1% AEP EVENT

A climate change scenario (for the 1% AEP events) was modelled for the 2081-2100 timeframe, for the RCP 8.5. This is based on the increases in rainfall intensity of 35%, 30%, 26% and 22% respectively for 1-hour, 6-hour, 12-hour and 24-hour duration events.

4.2.3 Losses

A series of land use types and importantly hydrological areas, were assigned a Manning's "*n*" (surface roughness), initial loss and a continuing loss. Table 4-3 summarises the adopted roughness and loss parameters. It should be noted these parameters were calibrated to a historic event where streamflow gauges were present within the catchment. Figure 4-3 displays the roughness layer based on the land use type, showing most land use is forest and grassland.



TABLE 4-3 DESIGN MODEL PARAMETERS

Hydrological areas	Land use types	Manning's n	Initial loss (IL) – mm	Continuing loss (CL) – mm/hr
Entire M03 catchment	Forest	0.10	10	0.8
	Grassland	0.06	15	0.5
	Cropland – perennial	0.04	20	2
	Cropland – annual	0.04	20	2
	Wetland – open water	0.04	0	0
	Wetland – vegetated	0.05	10	1
	Urban areas	0.10	5	1.5
	Waterways	0.05	0	0
	Other	0.06	15	1.5

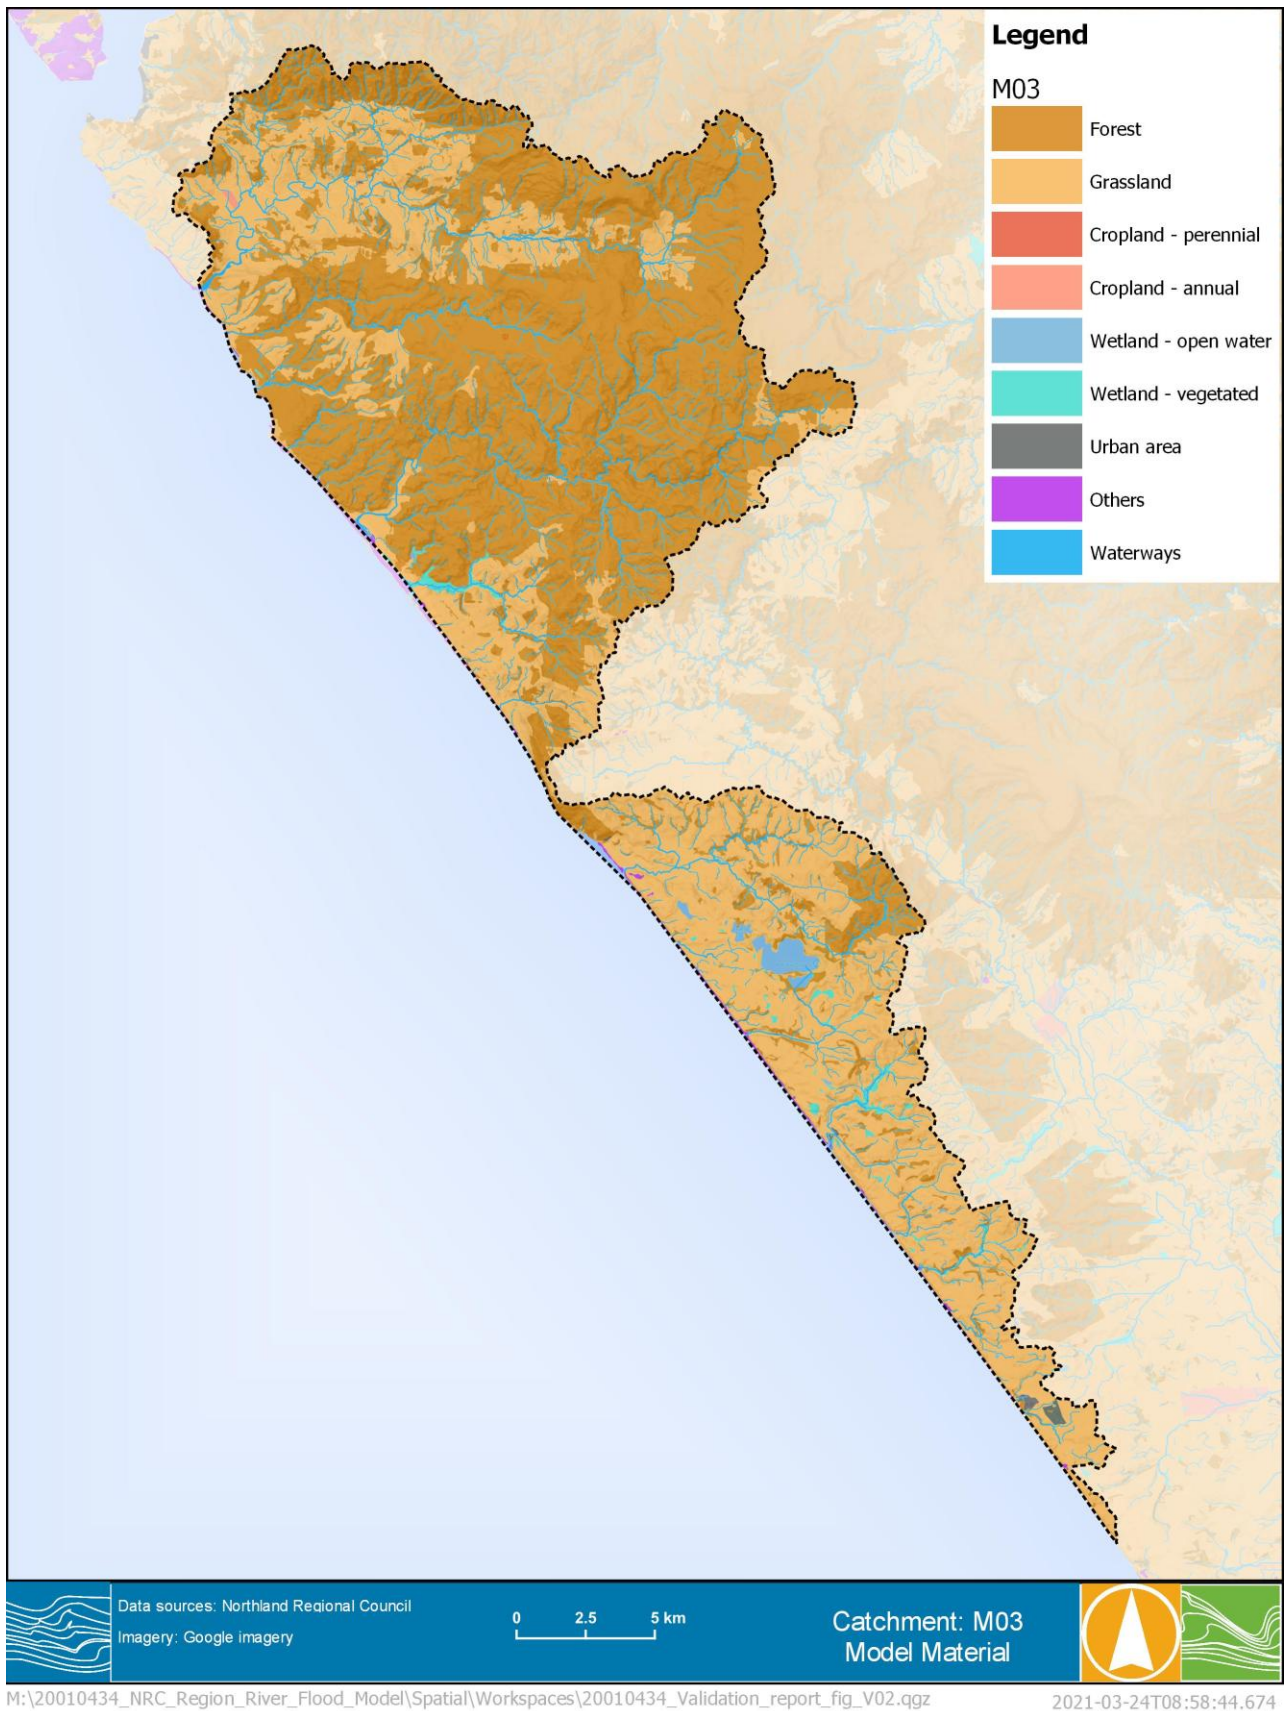


FIGURE 4-3 HYDRAULIC MODEL MATERIAL LAYER



4.2.4 Boundaries

As the Waimamaku catchment is a coastal catchment, a static tail-water (i.e. 2161 mm OTP) outflow boundary based on the 2 year ARI tide level³ at Pouto Point was used for the design modelling. And a 1.2 m sea level rise was adopted for climate change runs. In the calibration modelling, this boundary was a tidal boundary (i.e. type HT), using the tidal records during the event at Pouto Point gauge.

There is no upstream inflow coming from upstream catchments applied in this catchment model.

³ MWH, 2010 *Priority Rivers – Flow Assessment, Sea Level Rise and Storm Surge*, prepared for Northland Regional Council



5 MODELLING RESULTS

5.1 Modelled Result Processing/Filtering

Design modelling consisted of running the model for four storm durations (1-hour, 6-hour, 12-hour and 24-hour) with the results enveloped for each design event (i.e. 1%, 2% and 10% AEP) to ensure the critical duration was well represented across each part of the catchment. Each model run produced gridded results, including depth, water surface elevation (WSE), hazard (Z0) and velocity. Several post-processing steps were required to produce the final design modelling outputs. These are described as follows:

Step 1:

- The modelling results are firstly merged to produce the maximum outputs of the range of storm durations modelled. For example, the maximum 1% AEP flood depth is produced by merging the depth results of 4 different duration runs so the depth produced by the critical storm duration across each part of the catchment is well represented. Effectively, a map of the worst-case scenario at each location (based on the modelled scenarios) is generated across the whole area.

Step 2:

- The maximum gridded results are then remapped to a finer DEM grid using the 5-m LiDAR data. This allows the flood extent to be more accurately displayed on the map and the higher resolution gridded results (i.e. same resolution as the 5-m DEM) to be produced.

Step 3:

- Finally, the remapped results are post-processed by filtering out depths below 100mm and puddle areas less than 2000m² as agreed with NRC.

Figure 5-1, Figure 5-2 and Figure 5-3 respectively show the final post-processed flood depths, velocity and hazard of the 1% AEP design event modelled for M13. Figure 5-4 shows the flood depth map zoomed in at a township as an example. It is noted that the hazard classification is based on the following criteria:

TABLE 5-1 FLOOD HAZARD CLASSIFICATION

Hazard classification	Hazard – VxD (m ² /s)
Low	< 0.2
Low to Moderate	0.2 to 0.4
Moderate	0.4 to 0.6
Moderate to High	0.6 to 0.84
High	> 0.84

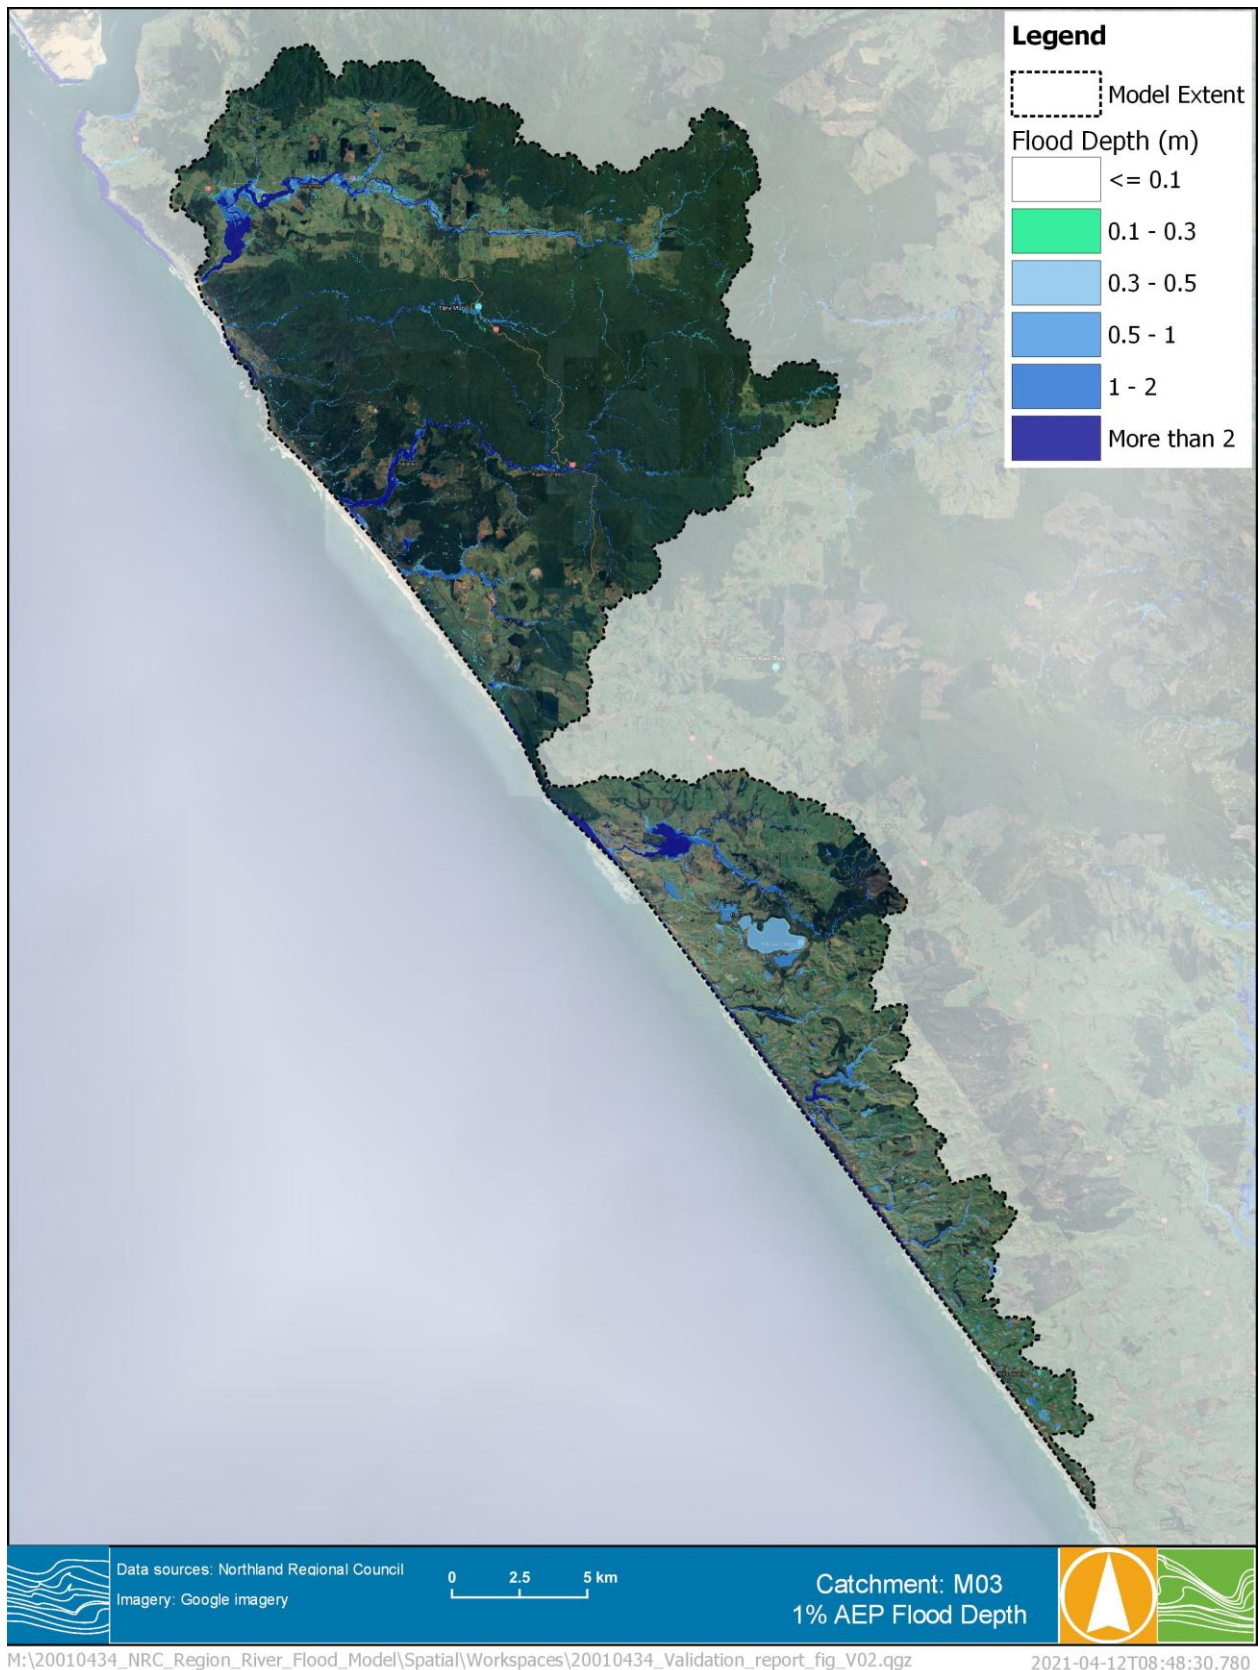


FIGURE 5-1 DESIGN MODELLING OF 1% FLOOD DEPTH

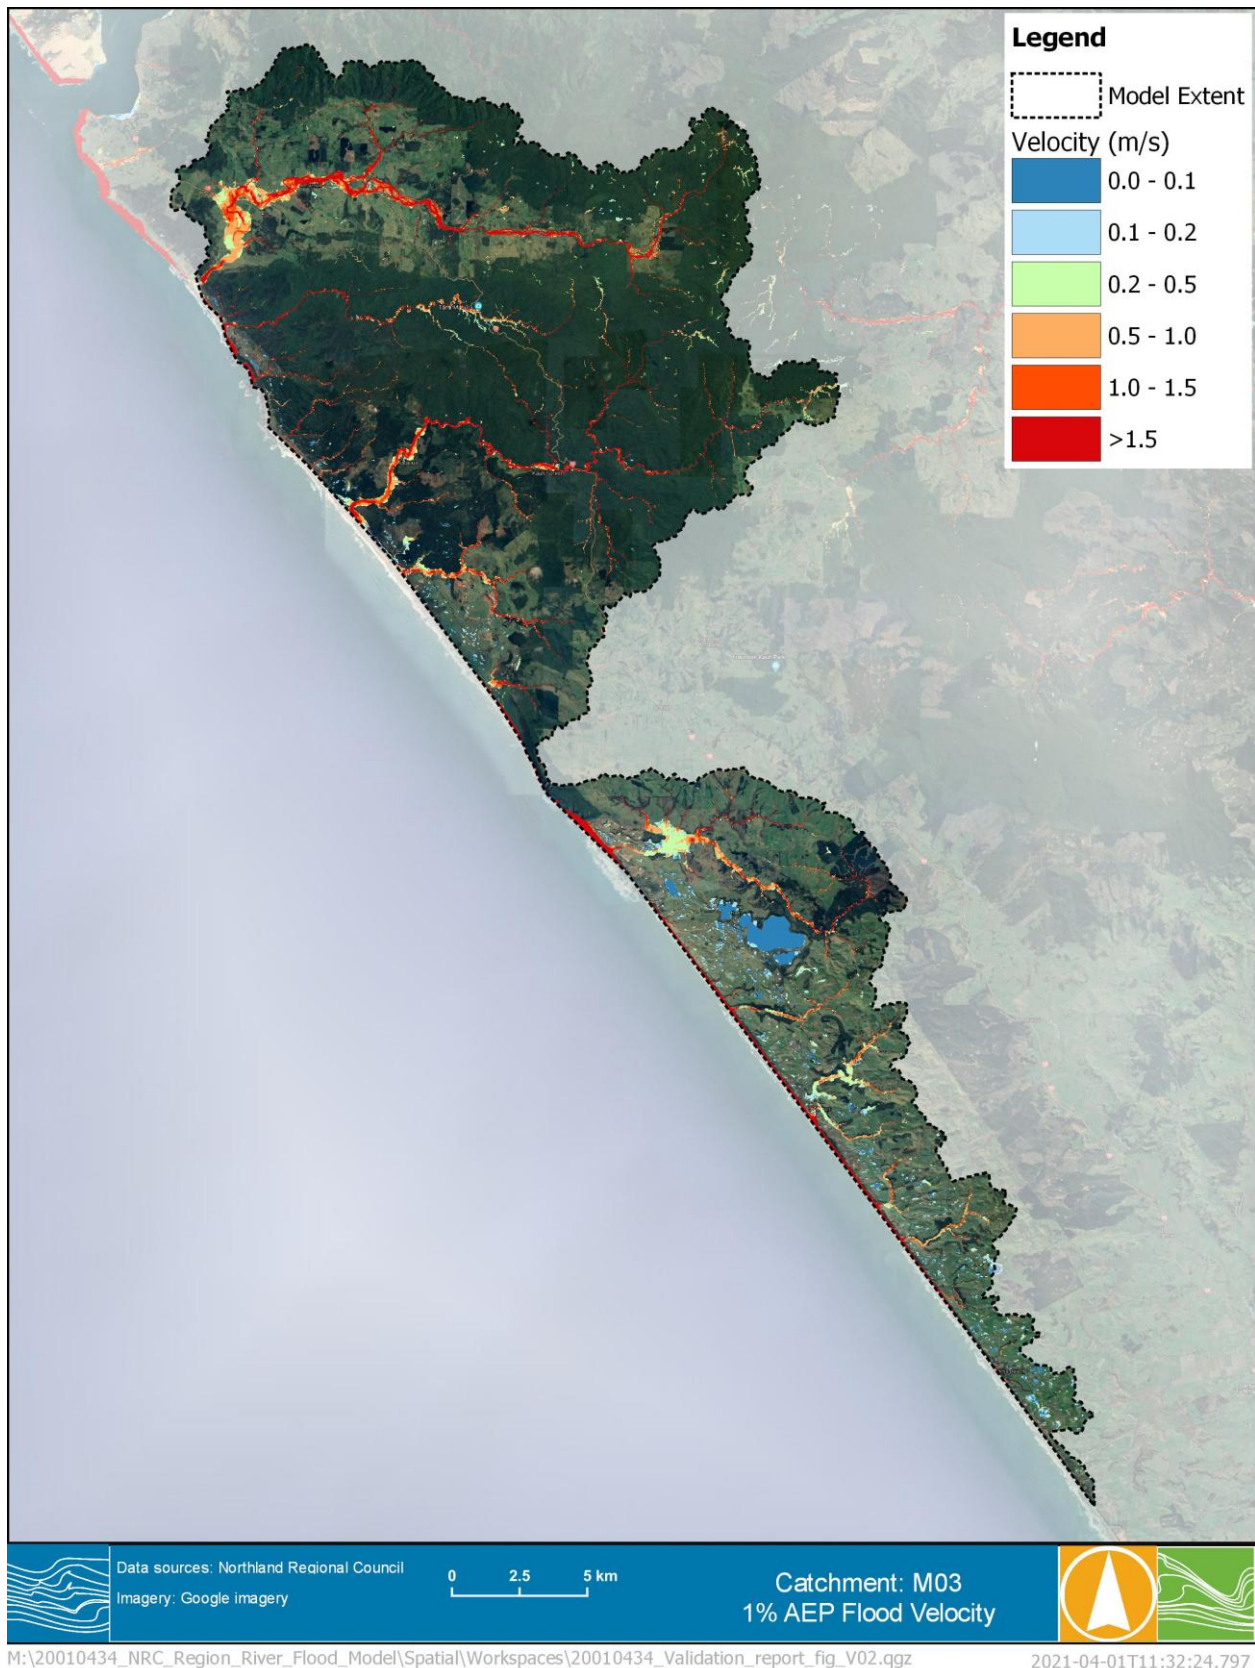


FIGURE 5-2 DESIGN MODELLING OF 1% AEP FLOOD VELOCITY

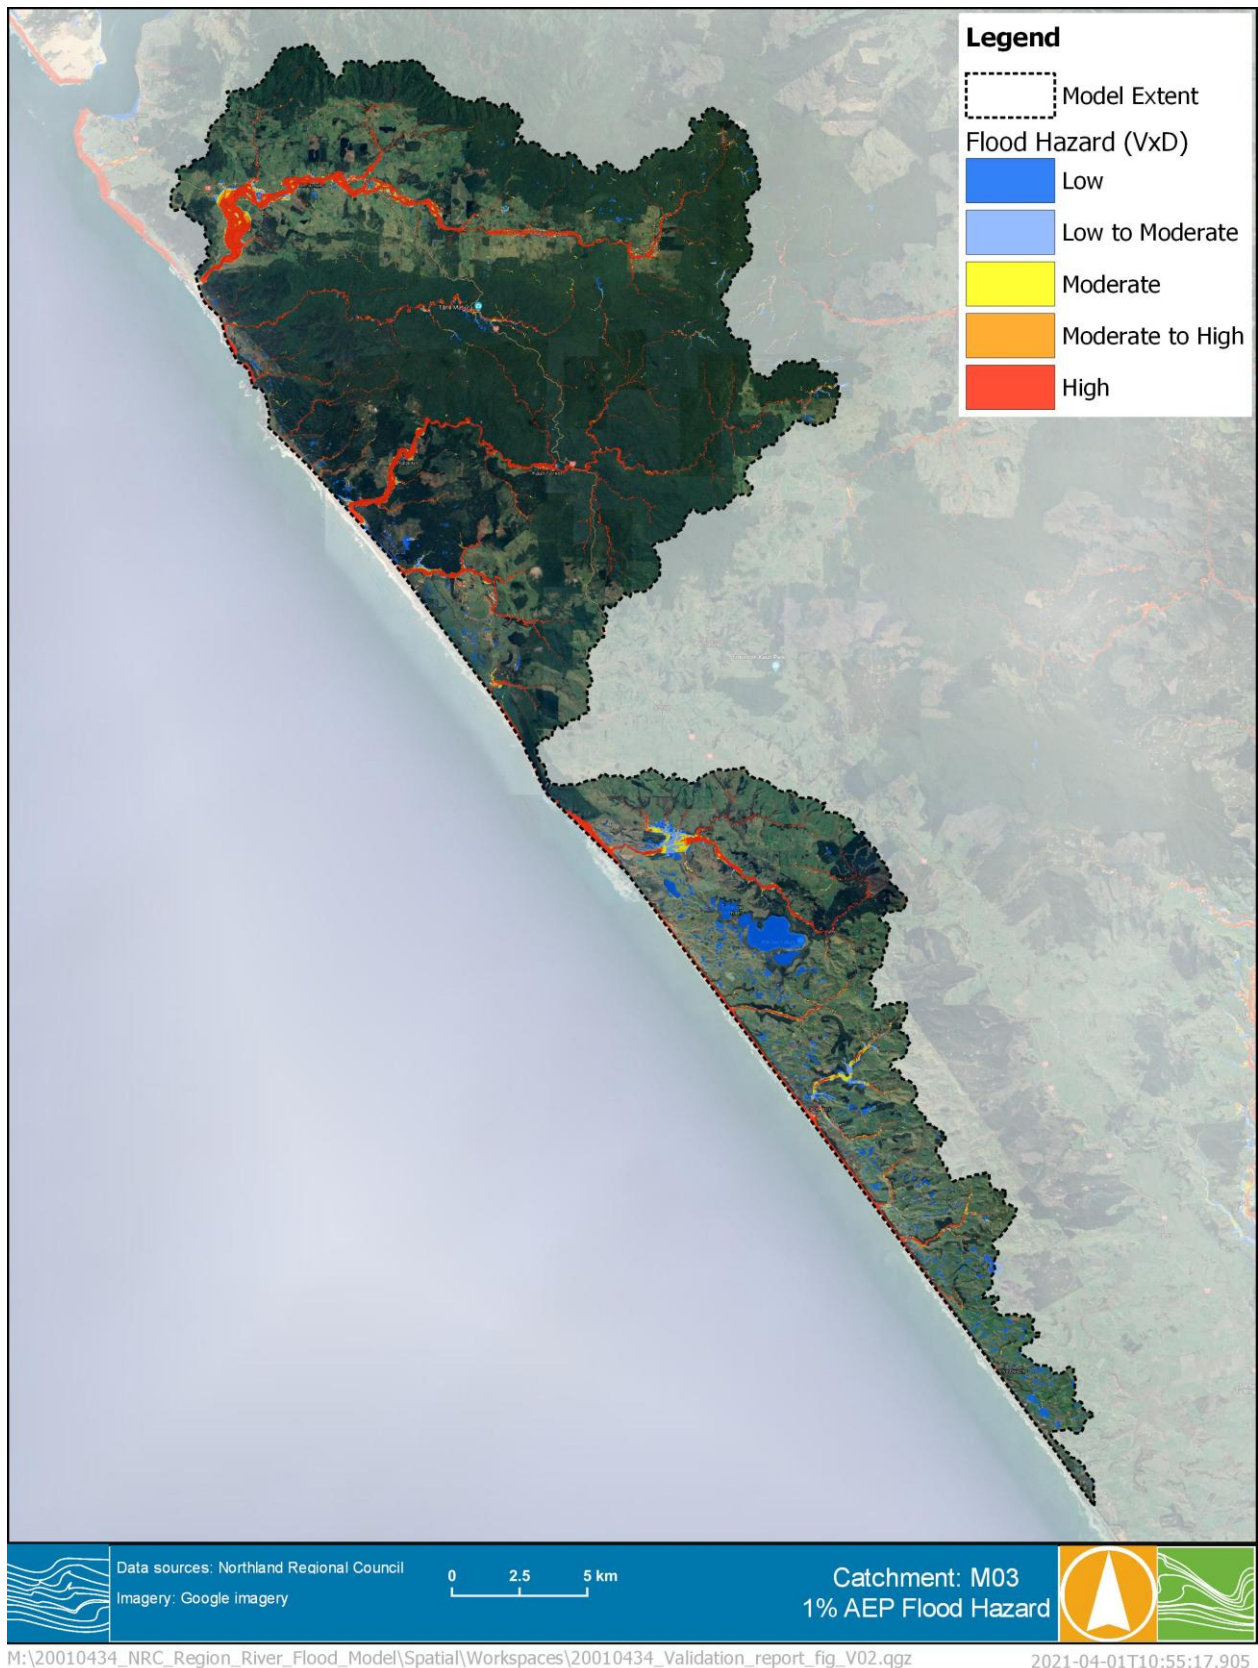


FIGURE 5-3 DESIGN MODELLING OF 1% AEP FLOOD HAZARD

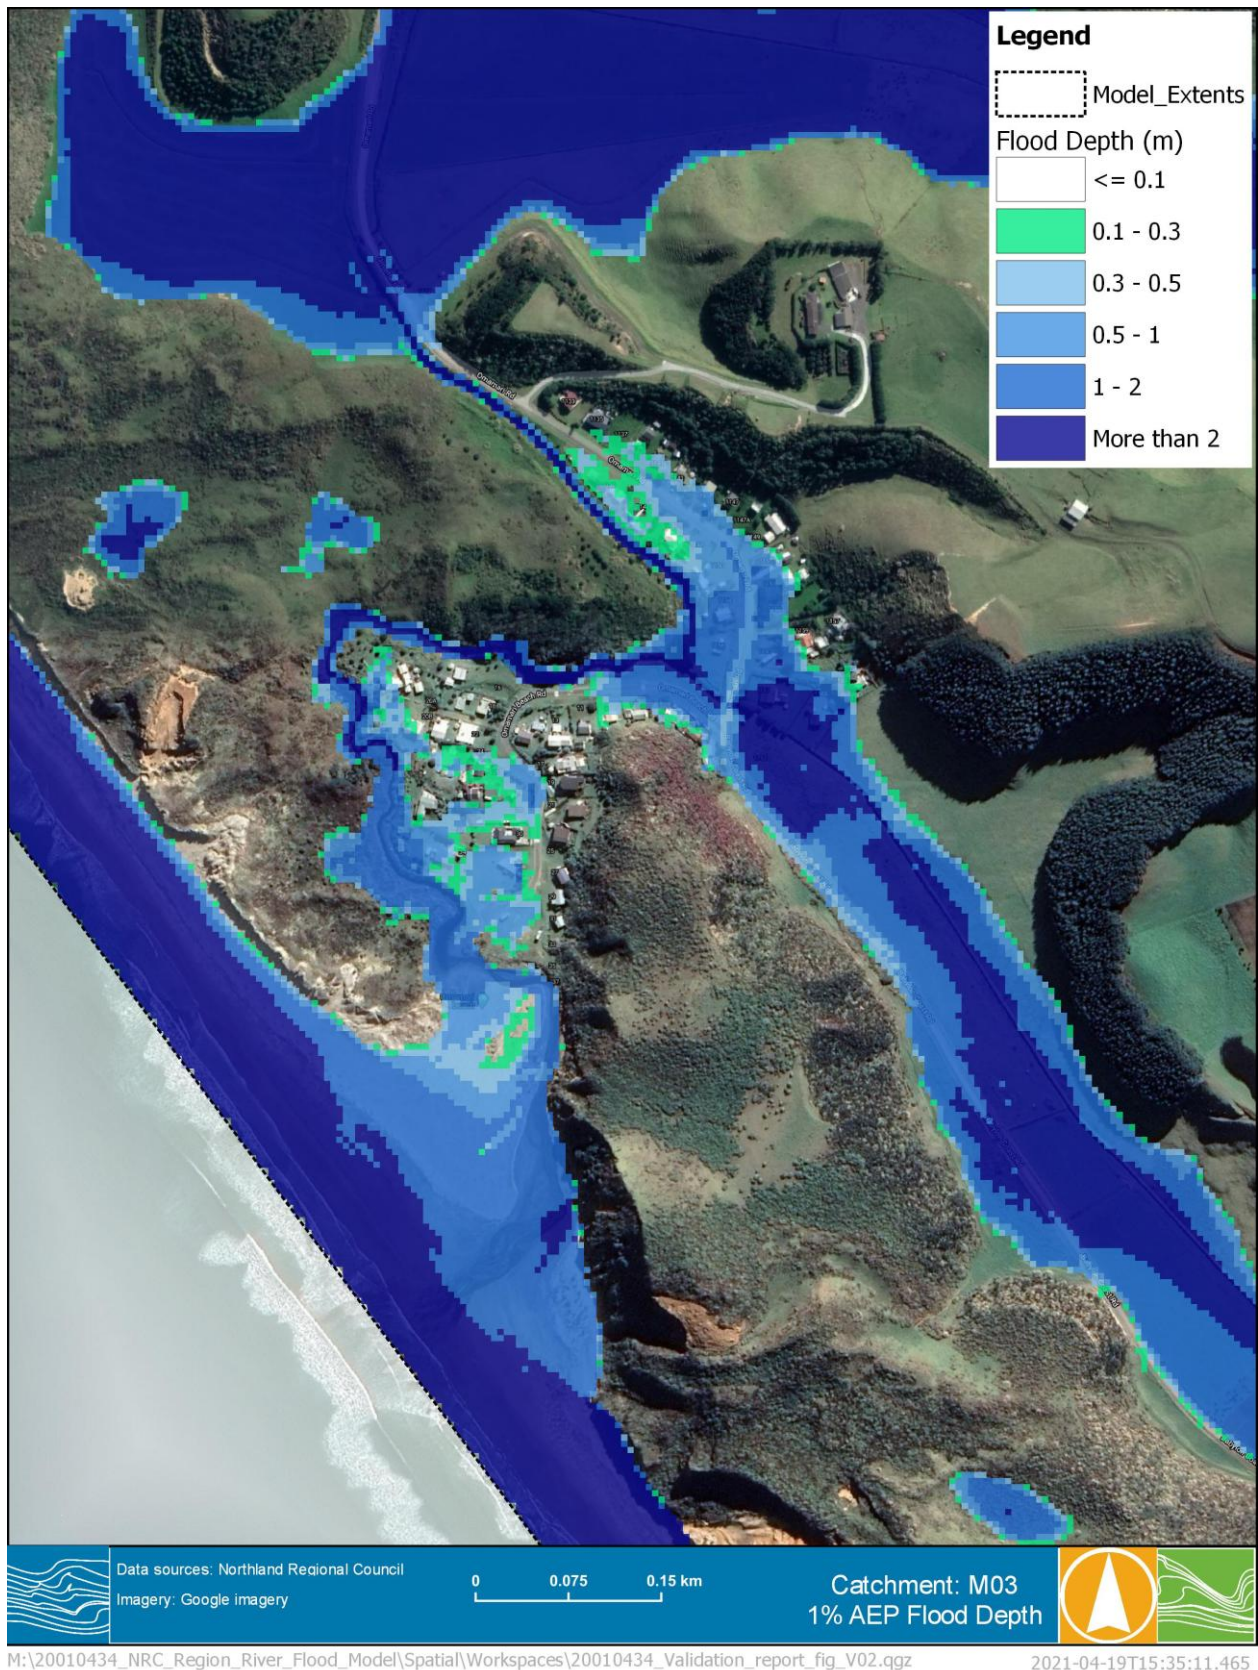


FIGURE 5-4 DESIGN MODELLING OF 1% AEP FLOOD DEPTH ZOOMED AT A TOWNSHIP

6 VERIFICATION OF DESIGN FLOWS

Flow lines were included at gauge locations in the hydraulic model as 2D Plot Output (2D PO) for calibration and design events. This allows flow hydrographs and peak flows to be extracted at these locations. Figure 6-1 displays the location of streamflow gauges in the Waimamaku catchment.

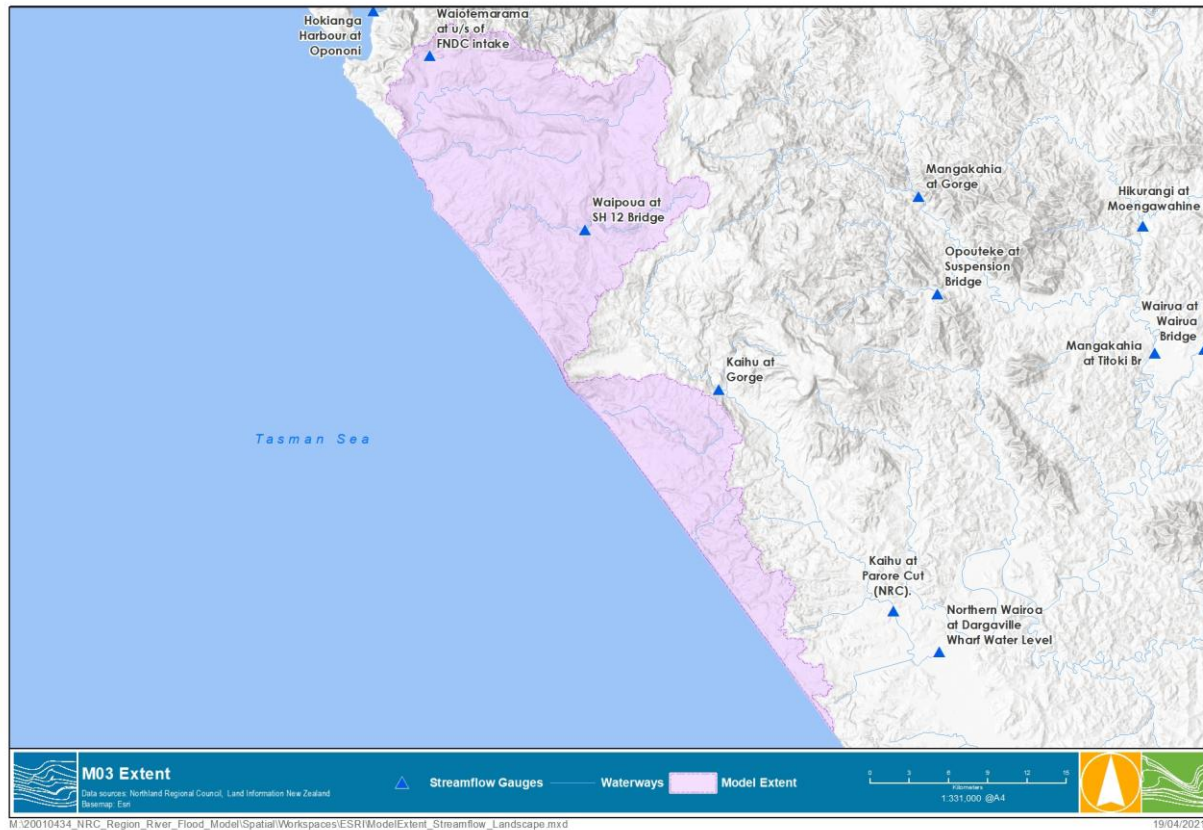


FIGURE 6-1 AVAILABLE STREAMFLOW GAUGES WITHIN WAIMAMAKU CATCHMENT

The modelled peak flow for the 1% AEP design flood was compared with hydrological estimates, including rational method and SCS method, as well as the historic maxima from streamflow gauge records.

6.1 Regional Estimation Methods

For catchments where a suitable streamflow gauge record was not available, additional estimation methods were used to provide design flow verification. These methods are based on empirical estimations using catchment area and design rainfall totals to verify design flows. These methods were checked for each streamflow gauge location within the study area and are described below.



6.1.1 NIWA New Zealand River Flood Statistics Portal

The New Zealand River Flood Statistics portal⁴ provides peak flood estimation at streamflow gauging stations and the entire river system in New Zealand completed in 2018. The design estimates can be extracted from the portal are:

- Flood Frequency estimates (at flow gauge).
- Flood Frequency estimates, noted as Henderson & Collins 2018 (at river reach).
- Rational Method HIRDS V3 (at river reach).

The flood frequency estimates given by the portal are determined using the Mean Annual Flow method developed by Henderson & Collins (2018)⁵.

6.1.2 SCS method

The Soil Conservation Service (SCS) method, first developed by the U.S. Department of Agriculture's Soil Conservation Service, calculates peak flood flow based on rainfall and land-cover-related parameters. It is the recommended method for stormwater design in the Auckland region, providing a useful comparison. The peak flow equation is:

$$Q = (P - I_a)^2 / (P - I_a + S)$$

where:

- Q is run-off depth (millimetres)..
- P is rainfall depth (millimetres)
- S is the potential maximum retention after run-off begins (millimetres).
- I_a is initial abstraction (millimetres), which is 5 millimetres for permeable areas and zero otherwise.

The retention parameter S (measured in millimetres) is related to catchment characteristics through:

$$S = (1000/CN - 10) 25.4.$$

The value of the curve number (CN) represents the run-off from 0 (no run-off) to 100 (full run-off) and it is influenced by soil group and land use. A CN value of 50 was used for the SCS estimation of this catchment.

The run-off depth (Q) is then converted to a peak flow rate using the SCS unit hydrograph.

6.1.3 Rational Method

The Rational Method is widely used across both New Zealand and Australia. The equation is based on catchment area and design rainfall. The equation is:

$$Q = C i A / 3.6$$

where:

- Q is the estimate of the peak design discharge in cubic meters per second
- C is the run-off coefficient

⁴ NIWA Flood Frequency tool, accessed via: <https://niwa.co.nz/natural-hazards/hazards/floods>

⁵ Henderson, R.D., Collins, D.B.G., Doyle, M., Watson, J. (2018) *Regional Flood Estimation Tool for New Zealand Final Report Part 2*. NIWA Client Report



- i is rainfall intensity in mm/hr hour, for the time of concentration
- A is the catchment area in km^2 .



6.2 Verification Results

Table 6-1 summarises the comparison of 1% AEP peak flow estimates with the modelled values at streamflow gauging stations in the Waimamaku catchment and the differences between the estimation methods and modelled results can be visualised in Figure 6-2.

The rational method and the SCS method are only applicable for relatively small catchments, with the SCS method limited to 12 km². The catchment size for Waiotemarama at U/S of FNDC intake gauge is 4 km² and for SH 12 Bridge gauge is 65 km². These equations are more applicable for flow estimate at Waiotemarama at U/S of FNDC intake gauge.

At the Waiotemarama at U/S of FNDC intake gauge, the modelled design flow has a good match to the two NIWA estimates. Overall, the modelled peak flow at this gauge tend to sit within a reasonable range of the design flow estimates. In contrast, the modelled design flow at Waipoua at SH 12 Bridge gauge tend to be higher than those empirical estimates. It should be noted that there is no flow record available at this gauge for calibration.

The use of empirical method estimations provides an additional degree of verification for streamflow gauges with less than 25 years of record. It is also noted that the calibration process identified uncertainty with the streamflow records for high flows. The uncertainty of high flow extrapolation at these gauges could result in further uncertainty of flow estimate methods that rely solely on streamflow gauge data. It is noted and accepted that the modelled peak flows at the two gauge locations tend to sit within a reasonable range of design flow estimates. Also that the empirical method estimation, in particular the FFA, provided an additional degree of verification for streamflow gauges with less than 25 years of record



TABLE 6-1 SUMMARY OF 1% AEP PEAK FLOW COMPARISON

Gauge location	Hydraulic model (m ³ /s)		Records at gauge (m ³ /s)		Empirical estimates (m ³ /s)			NIWA Flood Frequency Tool 2018 (m ³ /s)		
	Critical duration	Modelled peak	Jan 2011 peak	Highest on record	FFA	SCS	Rational method	NIWA – FF at gauge	NIWA – Rational method	NIWA – H&C 2018
Waiotemarama at U/S of FNDC intake gauge	1 hr	62	N/A	16	N/A**	9.3	18	N/A	65	46
Waipoua at SH 12 Bridge*	6 hr	705	N/A	N/A	N/A	101	98	N/A	N/A	477

*This gauge has no record available

**Only 7 years of data, FFA is not applicable

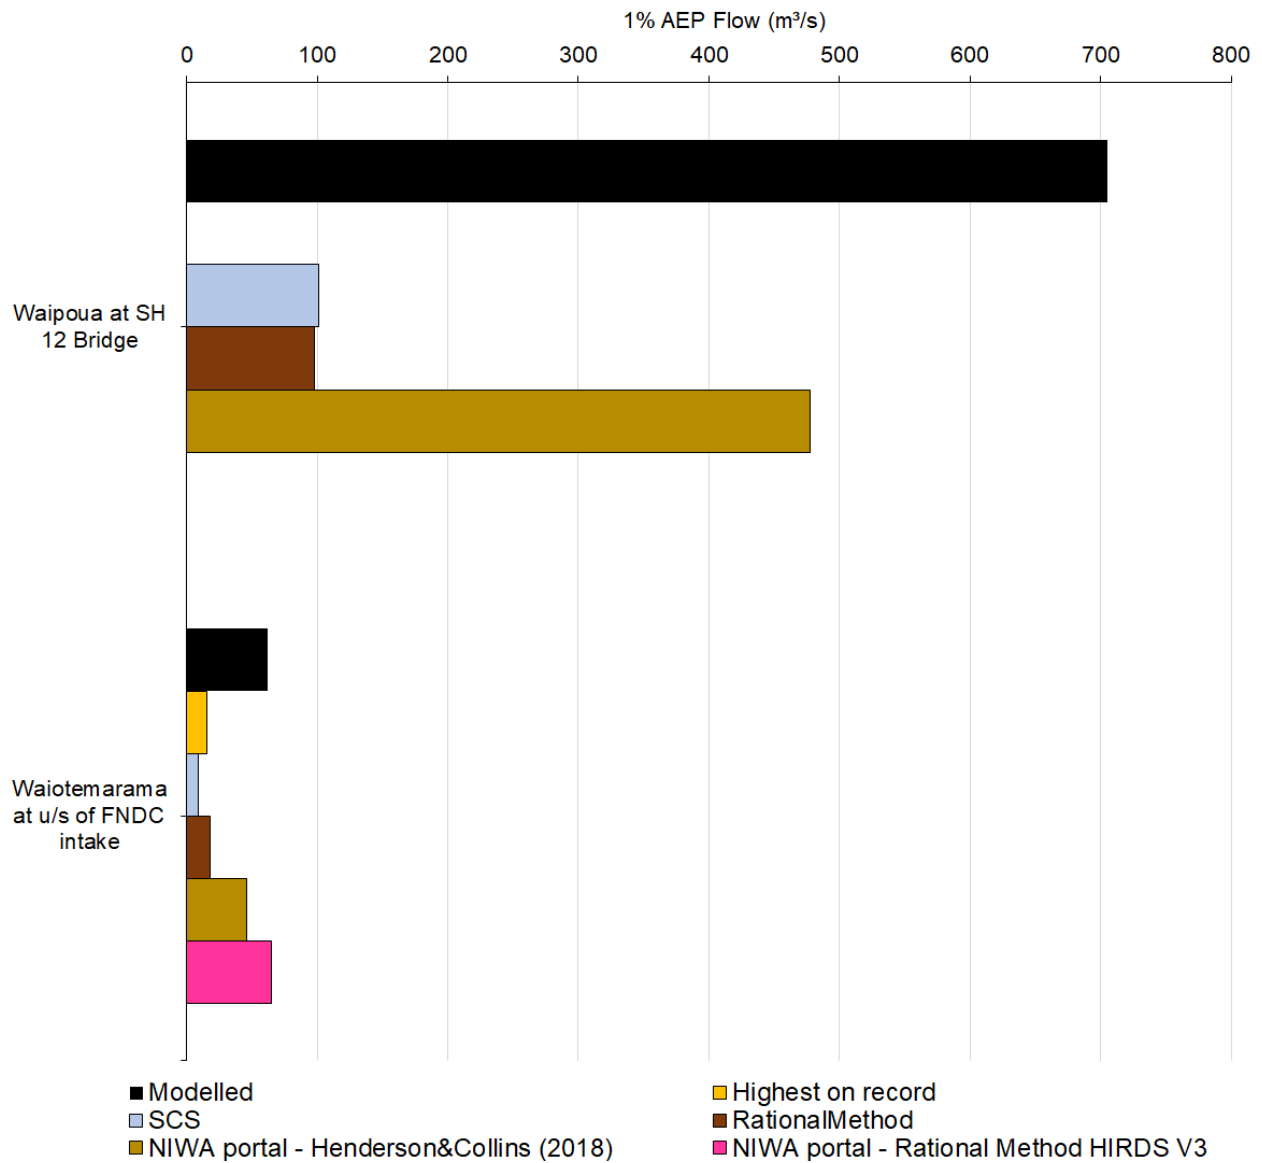


FIGURE 6-2 VERIFICATION OF DESIGN MODELLING RESULTS AGAINST HYDROLOGICAL ESTIMATES



7 SUMMARY

The Waimamaku catchment model (M03) was calibrated to the June 2020 flood event. The design modelling of this catchment consisted of four storm durations (1-hour, 6-hour, 12-hour and 24-hour) for each design AEP (i.e. 1%, 2% and 10% AEP). Design flood extents and gridded results, including depth, water surface elevation, velocity and hazard were produced and delivered to NRC.

The modelled 1% AEP design flows were verified against several design flood estimation methods at streamflow gauging stations. The comparison of design flows provides a general validation check of the modelled results given the accuracy of these estimation methods can be constrained by the reliability of gauged flow records (where used) and general limitations with empirical design estimates. Overall, the modelled design flow at Waitemarama at U/S of FNDC intake gauge assessed within the study area provided a reasonable fit to design flow estimates.

When considering the scope and the scale of this project, the current modelling results are considered fit for use. Modelling outputs can be used to identify flood hazard and potential flood risk. It can also inform planning decisions, infill flood mapping between detailed flood studies and provide a basis for broad emergency management exercises.

