19 Te Ti Bay (Waitangi)

Description and geomorphology

Te Ti Bay is located approximately 12 km southeast of Kerikeri. The site has an open coast shoreline facing north east and an estuary shoreline facing north-west.

The open coast shoreline (Te Ti Bay) is approximately 1.1 km long and comprises medium to coarse sand with some shell component. The beach face is relatively steep and has a berm width of 5 to 10 m above the high tide line.

The backshore is fully grassed down to the beach face, with no established dune vegetation. The backshore elevation is ranges from approximately RL 3 to 6 m.

The southern end of the site transitions to a cliff shoreline, which forms a rocky headland at this location. The headland comprises Greywacke material.

The estuary shoreline is approximately 400 m long. There is a relatively narrow fine sand beach that is approximately 5 m wide. The toe of the beach transitions into intertidal mud flats. The backshore elevation is approximately RL 1 to 3 m in this location.

Local considerations

Two stormwater outlets exist along Te Ti Bay, which have a localised effect on the shoreline position.

A rock revetment is located at the northern end of Te Ti Bay. The revetment is approximately 450 m long and the toe of the structure is location at or below the high tide line.

Coastal Erosion Hazard Assessment

The site is split into five cells based on differences in geomorphology, dune height and shoreline movement trends.

Adopted component values are presented within Table 19-1. Short term erosion values range from 2 to 6 m within the estuary to 4 to 10 m on the ocean side. The shoreline is slightly erosional within the estuary and variable to accretionary on the ocean side.



Site Photograph A (estuary shoreline)



Site Photograph B (Ti te Bay - centre)



Site Photograph (Te Ti Bay - southern end)

Offshore slopes on the ocean side are very low resulting in large SLR-induced recession distances.

Histograms of individual components and resultant CEHZ distances using a Monte Carlo technique are shown in Figure 19-2 to Figure 19-5.

For cell 19A the cliff projection method has been adopted with future shoreline distances shown in Figure 19-1 and Table 3-2 instead of CEHZ distances.

Coastal Erosion Hazard Zone widths are presented within Table 199-2 to 19-4 and Figure 19-6. CEHZ1 values are 5 m within the estuary and 18 to 32 m on the ocean beaches and 18 m on the cliffed shoreline. CEHZ2 values are 17 m within the estuary, 96 to 106 m on the ocean beach due to the very flat offshore slopes and 23 to 33 m for the cliffed shoreline. CEHZ3 values are 20 m within the estuary, 131 to 142 m on the ocean beach and 25 to 34 m for the cliffed shoreline.

CEHZ's have been mapped in agreement with the calculated values. Note that cell 19D has experienced accretion since about 1951 over approximately 250 m, with CEHZs offset from the accreted most recent shoreline.

Figure 19-7 shows the available historic shorelines for Te Ti Bay (Waitangi).

Table 19-1 Component values for Erosion Hazard Assessment

Site		19. Waitangi									
Cell		19A¹	19B	19C ²	19D	19E					
Cell centre	E	1698138	1698197	1698343	1698711	1698953					
(NZTM)	N	6096076	6096202	6095856	6095592	6095522					
Chainage, m (fro	om N/W)	0-410	410-520	520-1180	1180-1470	1470-1680					
Morphology		Estuary Bank	Estuary Bank	Dune	Dune	Greywacke					
Short-term (m)	Min	2	2	4	4	0					
	Mode	4	4	6	6	0					
	Max	6	6	10	10	0					
Dune/Cliff elevation (m	Min	1.3	2.8	2.8	3.6	4.5					
above toe or scarp)	Mode	2.0	2.9	3.7	4.3	6.8					
	Max	2.6	3.0	5.7	5.3	9.2					
	Min	26.6	26.6	30	30	26.6					
Stable angle (deg)	Mode	30.2	30.2	32	32	30.2					
(* -6)	Max	33.7	33.7	34	34	33.7					
Long-term (m)	Min	-0.02	-0.02	0.075	0.2	-0.05					
-ve erosion +ve accretion	Mode	-0.05	-0.05	0	0.1	-0.1					
	Max	-0.1	-0.1	-0.075	0	-0.15					
	Min	0.75	0.75	0.024	0.024	0.75					
Closure slope (beaches)	Mode	0.5	0.5	0.009	0.009	0.5					
(*****	Max	0.25	0.25	0.008	0.008	0.25					
	RCP 2.6	0.16	0.16	0.16	0.16	0.16					
SIR 2080 (m)	RCP 4.5	0.21	0.21	0.21	0.21	0.21					
SLR 2080 (m)	RCP 8.5M	0.33	0.33	0.33	0.33	0.33					
	RCP 8.5H+	0.51	0.51	0.51	0.51	0.51					
	RCP 2.6	0.28	0.28	0.28	0.28	0.28					
SLR 2130 (m)	RCP 4.5	0.42	0.42	0.42	0.42	0.42					
2EV 5130 (III)	RCP 8.5M	0.85	0.85	0.85	0.85	0.85					
	RCP 8.5H+	1.17	1.17	1.17	1.17	1.17					

¹ Cliff projection method has been used, so distance to future cliff toe position has been tabulated. Actual CEHZ width will be greater depending on cliff height and stable slope angle.

 $^{^2\}mbox{CEHZO}$ included behind coastal protection structure.

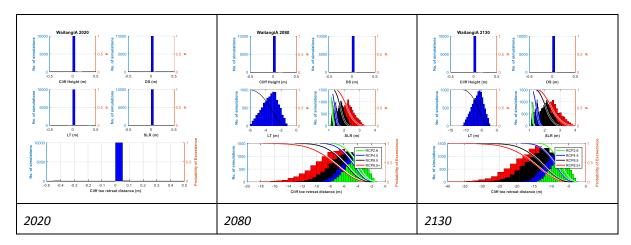


Figure 19-1 Histograms of parameter samples and the resultant shoreline distances for 2020, 2080 and 2130 timeframes for cell 19A

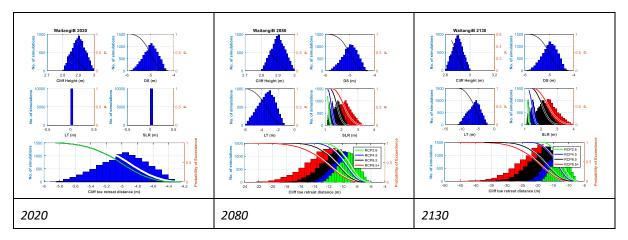


Figure 19-2 Histograms of parameter samples and the resultant shoreline distances for 2020, 2080 and 2130 timeframes for cell 19B

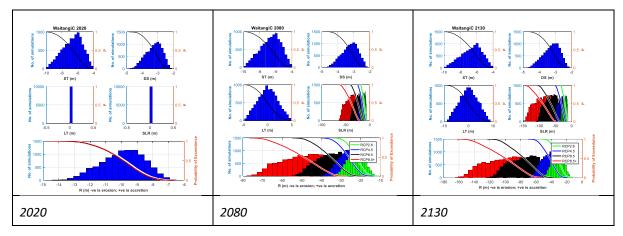


Figure 19-3 Histograms of parameter samples and the resultant shoreline distances for 2020, 2080 and 2130 timeframes for cell 19C

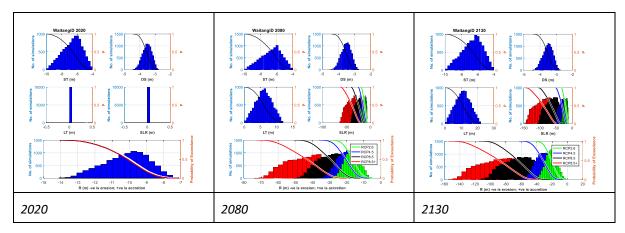


Figure 19-4 Histograms of parameter samples and the resultant shoreline distances for 2020, 2080 and 2130 timeframes for cell 19D

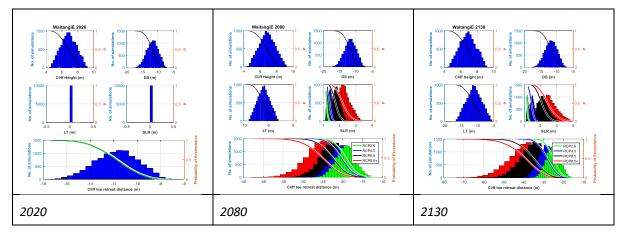


Figure 19-5 Histograms of parameter samples and the resultant shoreline distances for 2020, 2080 and 2130 timeframes for cell 19E

Table 199-2 Coastal Erosion Hazard Zone Widths for 2020

	Site	19. Waitangi										
		A*	В	С	D	E						
	Min	0	-4	-7	-7	-7						
	99%	0	-4	-7	-8	-8						
	95%	0	-5	-8	-8	-9						
nce	90%	0	-5	-8	-9	-9						
eda	80%	0	-5	-9	-9	-10						
Probability of CEHZ (m) Exceedance	70%	0	-5	-9	-9	-11						
n) E	66%	0	-5	-9	-10	-11						
Z (r	60%	0	-5	-9	-10	-11						
H	50%	0	-5	-10	-10	-12						
ъ	40%	0	-5	-10	-10	-12						
iit	33%	0	-5	-10	-11	-13						
bab	30%	0	-5	-11	-11	-13						
Pro	20%	0	-5	-11	-11	-13						
_	10%	0	-5	-12	-12	-14						
	5%	0	-6	-12	-12	-15						
	1%	0	-6	-13	-13	-16						
	Max	0	-6	-14	-14	-18						

^{*}Cliff projection method has been used, so cliff toe position has been tabulated, which has been assumed to be unchanged from the adopted 2019 baseline. Actual CEHZ width will be greater depending on cliff height and stable slope angle.

Table 199-3 Coastal Erosion Hazard Zone Widths Projected for 2080


Site										19. Waitangi											
Cell			1	L9A		19B				19C				19D				19E			
RCP	scenario	2.6	4.6	8.5	8.5+	2.6	4.6	8.5	8.5+	2.6	4.6	8.5	8.5+	2.6	4.6	8.5	8.5+	2.6	4.6	8.5	8.5+
	Min	-1	-2	-2	-2	-6	-6	-7	-7	-11	-13	-19	-27	-4	-7	-12	-20	-12	-13	-13	-14
	99%	-2	-2	-2	-3	-7	-7	-7	-8	-14	-17	-23	-31	-8	-10	-16	-25	-14	-15	-16	-17
	95%	-2	-2	-3	-3	-7	-8	-8	-9	-16	-19	-25	-34	-10	-13	-19	-28	-15	-16	-18	-19
	90%	-3	-3	-3	-4	-8	-8	-9	-10	-17	-20	-27	-36	-11	-14	-21	-30	-16	-17	-19	-20
ce	80%	-3	-3	-4	-5	-8	-9	-9	-10	-19	-22	-29	-40	-13	-16	-23	-34	-17	-18	-20	-22
dar	70%	-3	-4	-4	-5	-8	-9	-10	-11	-20	-23	-31	-43	-14	-18	-25	-37	-18	-19	-21	-23
ÇGE	66%	-3	-4	-5	-6	-9	-9	-10	-11	-21	-24	-32	-44	-15	-18	-26	-38	-18	-19	-21	-23
(m) Exceedance	60%	-4	-4	-5	-6	-9	-9	-10	-12	-21	-25	-33	-46	-16	-19	-27	-40	-19	-20	-22	-24
u) z	50%	-4	-4	-5	-6	-9	-10	-11	-12	-22	-26	-35	-49	-17	-20	-30	-43	-19	-20	-22	-25
СЕНZ	40%	-4	-5	-6	-7	-10	-10	-12	-13	-23	-28	-37	-52	-18	-22	-32	-47	-20	-21	-23	-26
þ	33%	-5	-5	-6	-7	-10	-11	-12	-14	-24	-29	-39	-55	-19	-23	-34	-49	-20	-21	-24	-27
Probability	30%	-5	-5	-6	-7	-10	-11	-12	-14	-25	-29	-40	-56	-19	-23	-34	-51	-21	-22	-24	-27
obak	20%	-5	-6	-7	-8	-10	-11	-13	-15	-26	-31	-42	-60	-20	-25	-37	-55	-21	-23	-25	-29
Pro	10%	-6	-6	-8	-9	-11	-12	-14	-16	-28	-33	-46	-65	-22	-27	-40	-59	-22	-24	-27	-31
	5%	-6	-7	-8	-10	-12	-13	-15	-18	-29	-35	-48	-68	-24	-29	-42	-62	-23	-25	-28	-32
	1%	-7	-8	-9	-11	-12	-13	-16	-20	-32	-37	-51	-72	-26	-32	-45	-66	-25	-26	-30	-36
	Max	-7	-8	-10	-13	-13	-15	-19	-23	-34	-40	-55	-77	-30	-36	-51	-73	-27	-29	-35	-42
	CEHZ1	-5* -10										-32		-26				-21			

^{*}Cliff projection method has been used, so distance to future cliff toe position has been tabulated. Actual CEHZ width will be greater depending on cliff height and stable slope angle.

Table 199-4 Coastal Erosion Hazard Zone Widths Projected for 2130

Site											19	. Waitang	i									
Cell		19A					19B				19C				19D				19E			
RCP	scenario	2.6	4.6	8.5	8.5+	2.6	4.6	8.5	8.5+	2.6	4.6	8.5	8.5+	2.6	4.6	8.5	8.5+	2.6	4.6	8.5	8.5+	
	Min	-3	-3	-4	-4	-7	-7	-8	-9	-13	-20	-38	-52	-1	-7	-26	-40	-15	-15	-16	-17	
	99%	-3	-4	-5	-6	-8	-9	-10	-10	-18	-25	-45	-60	-6	-13	-34	-49	-17	-18	-19	-19	
	95%	-4	-5	-6	-7	-9	-10	-11	-12	-21	-29	-50	-66	-9	-17	-39	-55	-19	-19	-21	-21	
	90%	-5	-5	-7	-8	-10	-10	-12	-13	-23	-31	-54	-71	-12	-20	-43	-60	-20	-21	-22	-23	
a	80%	-5	-6	-8	-9	-10	-11	-13	-14	-26	-34	-60	-78	-15	-23	-49	-67	-21	-22	-24	-24	
Probability of CEHZ (m) Exceedance	70%	-6	-7	-9	-11	-11	-12	-14	-16	-28	-37	-65	-85	-17	-26	-54	-74	-22	-23	-25	-25	
eed	66%	-6	-7	-10	-11	-11	-12	-15	-16	-29	-38	-67	-88	-18	-27	-56	-77	-22	-23	-25	-26	
Exc	60%	-7	-8	-10	-12	-12	-13	-15	-17	-30	-40	-70	-92	-19	-29	-59	-81	-23	-24	-26	-27	
(E)	50%	-7	-8	-11	-13	-12	-13	-16	-18	-32	-42	-75	-100	-21	-32	-64	-89	-24	-25	-27	-28	
EHZ	40%	-8	-9	-12	-14	-13	-14	-17	-19	-33	-45	-81	-107	-23	-34	-70	-97	-24	-25	-28	-29	
of Cl	33%	-8	-10	-13	-15	-13	-15	-18	-20	-35	-47	-85	-113	-24	-37	-75	-103	-25	-26	-28	-29	
ity	30%	-8	-10	-13	-15	-13	-15	-18	-20	-35	-48	-87	-116	-25	-37	-76	-105	-25	-26	-29	-30	
abil	20%	-9	-11	-14	-16	-14	-16	-19	-21	-38	-51	-93	-125	-28	-41	-83	-115	-26	-27	-30	-31	
rob	10%	-10	-12	-16	-18	-15	-17	-21	-23	-41	-56	-101	-135	-31	-45	-91	-125	-28	-29	-31	-33	
	5%	-11	-13	-17	-20	-16	-18	-23	-25	-43	-59	-106	-142	-34	-49	-96	-131	-29	-30	-33	-34	
	1%	-12	-14	-19	-22	-17	-19	-25	-28	-47	-63	-113	-151	-38	-53	-102	-140	-31	-32	-35	-37	
	Max	-13	-16	-22	-26	-18	-21	-27	-31	-53	-71	-123	-162	-43	-60	-112	-151	-33	-35	-39	-41	
	CEHZ2	-17*					-23			-106			-96				-33					
	CEHZ3		-2	20*			-	-25				-142				-131				-34		

^{*}Cliff projection method has been used, so distance to future cliff toe position has been tabulated. Actual CEHZ width will be greater depending on cliff height and stable slope angle.

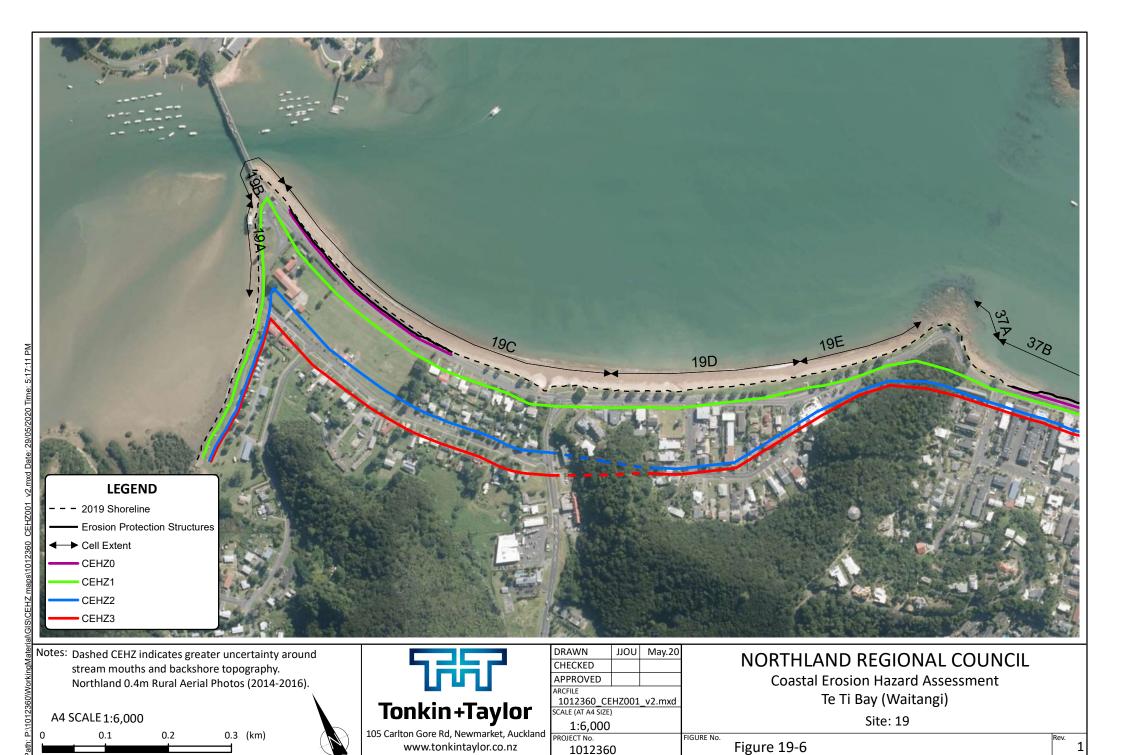



Northland 0.4m Rural Aerial Photos (2014-2016).

A4 SCALE 1:6,000

0.3 (km)



105 Carlton Gore Rd, Newmarket, Auckland PROJECT No. www.tonkintaylor.co.nz

DRAWN	NOU	Jun.20							
CHECKED									
APPROVED									
ARCFILE									
1012360_Historicv2.mxd									
SCALE (AT A4 SIZE)	1								

1:6,000 1012360

Historic Shorelines Te Ti Bay (Waitangi)

Site: 19

FIGURE No.

Figure 19-7